

Description

The SiT92110 is a 10 output low-jitter clock, fan-out buffer, intended to be used in low jitter, high frequency clock/data distribution. The low impedance LVCMOS outputs are designed to drive 50 Ω series or parallel terminated transmission lines.

The buffer can choose a clock input from primary, secondary or crystal source. The primary and secondary clock sources can be single ended or fully differential. The selected clock is distributed to 10 LVCMOS output drivers.

The SiT92110 operates from a 3.3 V/2.5 V/1.8 V core supply and 3.3 V/2.5 V/1.8 V/1.5 V output supply. The core supply and output supply are independent of each other and no supply sequencing is required.

Features

- Additive jitter performance of 50 fs RMS
- Typical output skew between clock outputs is 30 ps
- Level translation with core supply voltage of 3.3 V/2.5 V/1.8 V and 3.3 V/2.5 V/1.8 V/1.5 V output supply for LVCMOS output drivers
- The device inputs consists of primary, secondary and crystal inputs
- The inputs are selected by programming input select pins of SiT92110. The input clock receiver in SiT92110 can accept LVPECL, LVDS, LVCMOS, SSTL, HCSL and XTAL waveforms
- Crystal frequencies from 8 MHz to 50 MHz are supported
- Crystal input can be over driven with frequency up to 250 MHz in crystal bypass mode
- SiT92110 buffer is available in a 32-pin, 5 mm x 5 mm QFN package

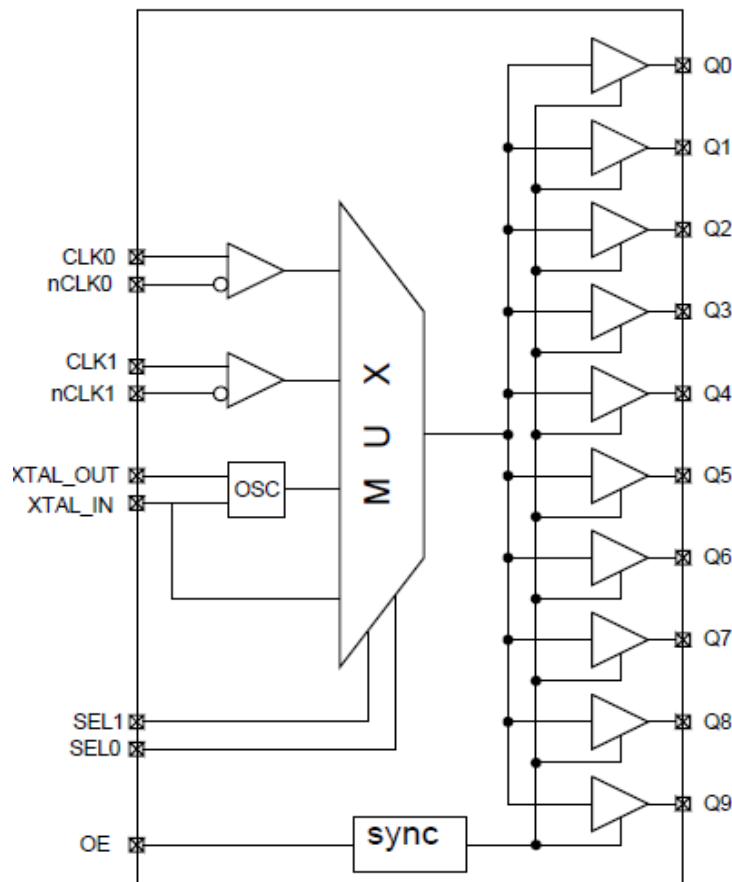


Figure 1. SiT92110 Functional Overview

Table of Contents

Description	1
Features	1
Ordering Information	3
Electrical Characteristics	4
Functional Description	10
VDD and VDDO Power Supplies	10
Clock Inputs	10
Clock States (Input vs Output States)	10
Application Information	12
Driving the Clock Inputs	12
Driving Clock Inputs with LVCMOS Driver (AC coupled)	12
Driving Clock Inputs with LVCMOS Driver (DC coupled)	13
Driving XTAL_IN with LVCMOS Driver (AC coupled)	16
Driving XTAL_IN with LVCMOS Driver (DC coupled)	17
LVDS (DC coupled)	18
HCSL (DC coupled)	18
LVPECL (DC coupled)	18
SSTL (DC coupled)	20
LVDS (AC coupled)	20
LVPECL (AC coupled)	21
Termination of Output Driver of SiT92110 for Various Load Configurations	21
SiT92110 Output ODR Termination for AC Coupled mode	21
SiT92110 Output ODR Termination for DC Coupled mode	22
CMOS (Capacitive load)	24
Power Considerations	24
Core Current in XO Mode	25
Parameter Measurement Information	25
Differential Input Level	25
Skew and Input to Output Delay	25
Rise and Fall Times	26
Isolation	26
Thermal Information	27
HOT Swap Recommendations	28
Introduction	28
Typical Differential Input Clock	28
Input Clock Termination with Hot Swap Protection	29
LVPECL Termination Example	29
LVDS Input Clock Termination Example	30
HCSL Input Clock Termination Example	30
LVCMOS Input Clock Termination with Hot Swap Protection	31
LVCMOS Output Clock Termination with Hot Swap Protection	32
Operation in Multiple VDDO Supply Domains	33
Package Dimensions and Patterns	34
Top Marking	35

Ordering Information

SiT92110A I - P

Part Family

"SiT92110"

Revision Letter

"A" is the revision of Silicon

Temperature Range

"I": Industrial, -40°C to 85°C

Packaging

"N": 500 u Tape & Reel

"P": 4 ku Tape & Reel

SiT92110 10 Output, LVCMOS, Ultra Low Jitter Buffer**Electrical Characteristics****Table 1. Absolute Maximum Ratings**

Parameters	Conditions	Symbol	Min	Typ	Max	Units
Core Supply Voltage		V_{DD}	-0.5		3.6	V
Output Supply Voltage		V_{DDO}	-0.5		3.6	V
Input voltage, All Inputs, except XTAL_IN		V_{IN}	-0.3		$V_{DD}+0.3$	V
XTAL_IN		V_{IN}	-0.5		1.8	V
Storage temperature		T_{STG}	-55		150	°C
Junction Temperature		T_J			125	°C
Moisture Saturation Level		MSL		3		

Notes:

- Exceeding maximum ratings may shorten the useful life of the device.
- Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or at any other conditions beyond those indicated under the DC Electrical Characteristics is not implied. Exposure to Absolute-Maximum-Rated conditions for extended periods may affect device reliability or cause permanent device damage.

Table 2. Recommended Operating Conditions

Parameters	Conditions	Symbol	Min	Typ	Max	Units
Core supply voltage		V_{DD}	3.135	3.3	3.465	V
			2.375	2.5	2.625	V
			1.71	1.8	1.89	V
Output supply voltage		V_{DDO}	3.135	3.3	3.465	V
			2.375	2.5	2.625	V
			1.6	1.8	2	V
			1.35	1.5	1.65	V
Ambient Temperature		T_A	-40	27	85	°C

Table 3. DC Electrical Characteristics

Unless otherwise specified: $V_{DD} = 3.3\text{ V} \pm 5\%$, $2.5\text{ V} \pm 5\%$, $V_{DDO} = 3.3\text{ V} \pm 5\%$, $2.5\text{ V} \pm 5\%$, $1.8\text{ V} \pm 10\%$, $1.5\text{ V} \pm 10\%$, $-40\text{ °C} \leq T_A \leq 85\text{ °C}$, CLK0/1 driven differentially, input slew rate $\geq 2\text{ V/ns}$. Typical values represent most likely parametric norms at $V_{DD} = 3.3\text{ V}$, $V_{DDO} = 3.3\text{ V}$, $T_A = 25\text{ °C}$.

Parameters	Conditions	Symbol	Min	Typ	Max	Units
Current Consumption						
Static current taken by core supply when no toggling	$V_{DD} = 3.3\text{ V}$, $V_{DDO} = 3.3\text{ V}$, $F_{in} = 0$	$I_{CORE,STATIC}$		16	19.8	mA
Static current taken by output driver supply when no toggling	$V_{DD} = 3.3\text{ V}$, $V_{DDO} = 3.3\text{ V}$, $F_{in} = 0$	$I_{ODR,STATIC}$		3.5	4.2	mA
Current taken by core supply, if XTAL is enabled	$V_{DD} = 3.3\text{ V}$, $V_{DDO} = 3.3\text{ V}$, $F_{OSC} = 25\text{ MHz}$	$I_{CORE,STATIC,XTAL}^{(1)}$		11.5	14	mA
Power Dissipation Capacitance per output	$V_{DD} = 3.3\text{ V}$, $V_{DDO} = 3.3\text{ V}$, $F_{in} = 200\text{ MHz}$	$C_{PD}^{(1)}$		4	5.2	pF
Dynamic current taken by core supply	$V_{DD} = 3.3\text{ V}$, $V_{DDO} = 3.3\text{ V}$, $F_{in} = 100\text{ MHz}$	$I_{CORE,DYN}$		1.3	1.56	mA
Input Control Pin Characteristic						
High level input voltage		V_{IH}	$0.7 \cdot V_{DD}$		V_{DD}	V
Low level input voltage		V_{IL}	GND		$0.3 \cdot V_{DD}$	V
High level input current	$V_{IH} = V_{DD} = 3.3\text{ V}$	I_{IH}		30	50	uA
Low level input current		I_{IL}	-20	0.1		uA
Pull down resistance		$R_{PULLDOWN}$		200		KΩ
Input capacitance		C_{IN}		2		pF

Notes:

- Specification is guaranteed by characterization and is not tested in production.

Table 4. Input Clock Characteristics

Unless otherwise specified: $V_{DD} = 3.3\text{ V} \pm 5\%$, $2.5\text{ V} \pm 5\%$, $V_{DDO} = 3.3\text{ V} \pm 5\%$, $2.5\text{ V} \pm 5\%$, $1.8\text{ V} \pm 10\%$, $1.5\text{ V} \pm 10\%$, $-40\text{ }^{\circ}\text{C} \leq T_A \leq 85\text{ }^{\circ}\text{C}$, CLK0/1 driven differentially, input slew rate $\geq 2\text{ V/ns}$. Typical values represent most likely parametric norms at $V_{DD} = 3.3\text{ V}$, $V_{DDO} = 3.3\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$.

Parameter	Condition	Symbol	Min	Typ	Max	Unit
DC Characteristics of universal input clock pins						
High level input current	$V_{IH} = V_{DD} = 3.465\text{ V}$	I_{IH}			650	μA
Low level input current		I_{IL}	-650			μA
Pull up or pull down resistor on CLK0/1		$R_{PULLUP_PULLDOWN}$		7.5		$\text{K}\Omega$
Differential Input Voltage Swing (peak to peak) ⁽¹⁾		V_{IDIFF}	0.15		1.3	V
Differential Input Common Mode Voltage ⁽²⁾	$V_{IDIFF} = 150\text{ mV}$	V_{ICM}	0.25		$V_{DD} - 0.85$	V
Single Ended Input High Voltage ⁽²⁾	Inverting differential input held at $V_{DD}/2$, $V_{DD} = 3.3\text{ V}$	V_{IHSE}	2		$V_{DD} + 0.3$	V
	Inverting differential input held at $V_{DD}/2$, $V_{DD} = 2.5\text{ V}$		1.6		$V_{DD} + 0.3$	V
Single Ended Input Low Voltage ⁽²⁾	Inverting differential input held at $V_{DD}/2$, $V_{DD} = 3.3\text{ V}$	V_{ILSE}	-0.3		1.3	V
	Inverting differential input held at $V_{DD}/2$, $V_{DD} = 2.5\text{ V}$		-0.3		0.9	V
AC Characteristics of universal input clock pins						
Input slew rate	20% to 80%	$\Delta V_i / \Delta T$		2		V/ns
Input Capacitance	Single ended	C_{IN}	—	700	—	fF
Input Frequency Range ⁽⁴⁾	LVDS and LVPECL outputs	f_{IN}	—	—	250	MHz
	HCSL outputs		—	—	250	MHz
	LVCMOS outputs		—	—	250	MHz
Input duty cycle, such that output duty cycle is equal to input duty cycle ⁽⁵⁾	The pass condition for the measurement is that output duty cycle is within $\pm 5\%$ of input duty cycle. The input clock amplitude is same as LVPECL standard.	I_{DC}	40		60	%
Mux isolation clk0 to clk1 ⁽³⁾	Offset > 50 KHz, PclkIn = 0 dBm, FclkIn0 = 156.25 MHz	ISO_{MUX}		-85		dBc
Crystal Characteristic						
Equivalent series resistance		ESR		35	60	Ω
load capacitance		C_L	6	8	10	pF
Shunt Capacitance		C_0		2	3	pF
Drive level				100	200	μW
Mode of oscillation				fundamental		
Supported crystal frequency range ⁽³⁾		Frequency	8		50	MHz
Input Voltage Swing	Bypass mode	V_{in_se}	1		1.8	V_{pp_se}
V_{ih_se}	Bypass DC coupled mode. SEL[1] = 1 & SEL[0]=1	V_{ih}	0.98			V
V_{il_se}		V_{il}			0.36	V
$F_{osc} = 8\text{ MHz}$	Settling time required for output in crystal mode	t_{settle}		14		ms
$F_{osc} = 25, 50\text{ MHz}$				8		ms
XO bypass AC coupled mode additive jitter ⁽³⁾	$V_{DDO} = 3.3\text{ V}$ Slew Rate > 2 V/ns $F_{in} = 48\text{ MHz}$	t_{jit}		100		fs
	$V_{DDO} = 2.5\text{ V}$ Slew Rate > 2 V/ns $F_{in} = 48\text{ MHz}$			115		fs
	$V_{DDO} = 1.8\text{ V}$ Slew Rate > 2 V/ns $F_{in} = 48\text{ MHz}$			230		fs

SiT92110 10 Output, LVCMOS, Ultra Low Jitter Buffer

Parameter	Condition	Symbol	Min	Typ	Max	Unit
Crystal Phase jitter ^[6]	RMS, integration BW 12 KHz to 5 MHz, $F_{\text{crystal}} = 25 \text{ MHz}$. Crystal input select Measured at $V_{\text{DD}} = V_{\text{DDO}} = 2.5 \text{ V}$	t_{jit}		155		fs

Notes:

1. Inverting differential input clock pin biased at $V_{\text{DD}}/2$.
2. Input common mode defined as V_{IH} (see Figure 26).
3. Specification is guaranteed by characterization and is not tested in production.
4. If the input clock is initially absent when the chip is just powered up, it will take at least 2 falling edge of clock cycles for the output to appear. Therefore, the buffer level translates DC only after it sees two consecutive falling edge of input clock.
5. Output duty cycle equals input duty cycle. ATE measurement done with 80% on time and 20% off time waveform to make sure that output duty cycle is equal to input duty cycle even with skewed input duty cycle.
6. Crystal Phase Jitter is measure on following part number, 7M-25.000MAKV-T.

Table 5. Output Clock Characteristics – LVCMOS

Parameter	Condition	Symbol	Min	Typ	Max	Unit
Maximum output frequency	Universal clock input	F_{out}			250	MHz
	XTAL ^[1]				50	MHz
Output duty cycle	For $F_{\text{in}} \leq 200 \text{ MHz}$	Odc	45		55	%
	For $200 \text{ MHz} < F_{\text{in}} < 250 \text{ MHz}$		40		60	
Output high level voltage	$V_{\text{DDO}} = 3.3 \pm 5\%$, 12 mA pull down current	V_{OH}	2.6			V
	$V_{\text{DDO}} = 2.5 \pm 5\%$, 8 mA pull down current		1.8			V
	$V_{\text{DDO}} = 1.8 \text{ V} \pm 200 \text{ mV}$, 2 mA pull down current		1.2			V
	$V_{\text{DDO}} = 1.5 \text{ V} \pm 150 \text{ mV}$, 2 mA pull down current		0.95			V
Output low level voltage	$V_{\text{DDO}} = 3.3 \pm 5\%$, 12 mA pull up current	V_{OL}			0.5	V
	$V_{\text{DDO}} = 2.5 \pm 5\%$, 8 mA pull up current				0.5	V
	$V_{\text{DDO}} = 1.8 \text{ V} \pm 200 \text{ mV}$, 2 mA pull up current				0.4	V
	$V_{\text{DDO}} = 1.5 \text{ V} \pm 150 \text{ mV}$, 2mA pull up current				0.35	V
Effective output impedance, for maximum slice strength	$V_{\text{DDO}} = 3.3 \text{ V}$	R_{out}		15		Ω
	$V_{\text{DDO}} = 2.5 \text{ V}$			18		Ω
	$V_{\text{DDO}} = 1.8 \text{ V}$			23		Ω
	$V_{\text{DDO}} = 1.5 \text{ V}$			28		Ω
Output skew ^[1]	$V_{\text{DDO}} = 3.465 \text{ V}$	t_{sk}		40		ps
	$V_{\text{DDO}} = 2.5 \text{ V}$			35		ps
	$V_{\text{DDO}} = 1.62 \text{ V}$			31		ps
	$V_{\text{DDO}} = 1.35 \text{ V}$			36		ps
Time for output enable or disable ^[1]		t_{en}			4	cycle
Input to clock edge to output clock edge delay	$V_{\text{DDO}} = 3.465 \text{ V}$, PCB trace of 5 inch, 10 pF capacitor AC coupled 50 Ω load	t_{d}		1.4		ns
	$V_{\text{DDO}} = 2.5 \text{ V}$, PCB trace of 5 inch, 10 pF capacitor AC coupled 50 Ω load			1.5		ns
	$V_{\text{DDO}} = 1.62 \text{ V}$, PCB trace of 5 inch, 10 pF capacitor AC coupled 50 Ω load			2		ns
	$V_{\text{DDO}} = 1.35 \text{ V}$, PCB trace of 5 inch, 10 pF capacitor AC coupled 50 Ω load			2.5		ns
Additive jitter ^[1]	$V_{\text{DDO}} = 3.465 \text{ V}$ Slew rate (SiT92110) $\geq 2 \text{ V/ns}$	t_{jit}		21		fs
	$V_{\text{DDO}} = 2.5 \text{ V}$ Slew rate (SiT92110) $\geq 2 \text{ V/ns}$			37		fs

SiT92110 10 Output, LVCMOS, Ultra Low Jitter Buffer

Parameter	Condition	Symbol	Min	Typ	Max	Unit
	$V_{DDO} = 1.62\text{ V}$ Slew rate (SiT92110) $\geq 2\text{ V/ns}$			87		fs
	$V_{DDO} = 1.35\text{ V}$ Slew rate (SiT92110) $\geq 2\text{ V/ns}$			233		fs
Rise time ^[1]	Output rise time 20% to 80% Load cap 5 pF, $V_{DDO} = 3.3\text{ V}$, AC coupled 50 Ω load	t_R			605	ps
	Output rise time 20% to 80% Load cap 5 pF, $V_{DDO} = 2.5\text{ V}$, AC coupled 50 Ω load				605	ps
	Output rise time 20% to 80% Load cap 5 pF, $V_{DDO} = 1.62\text{ V}$, AC coupled 50 Ω load				605	ps
	Output rise time 20% to 80% Load cap 5 pF, $V_{DDO} = 1.35\text{ V}$, AC coupled 50 Ω load				605	ps
Fall time ^[1]	Output fall time 20% to 80% Load cap 5 pF, $V_{DDO} = 3.3\text{ V}$	t_F			605	ps
	Output fall time 20% to 80% Load cap 5 pF, $V_{DDO} = 2.5\text{ V}$				605	ps
	Output fall time 20% to 80% Load cap 5 pF, $V_{DDO} = 1.62\text{ V}$				605	ps
	Output fall time 20% to 80% Load cap 5 pF, $V_{DDO} = 1.35\text{ V}$				605	ps

Notes:

1. Specification is guaranteed by characterization and is not tested in production.

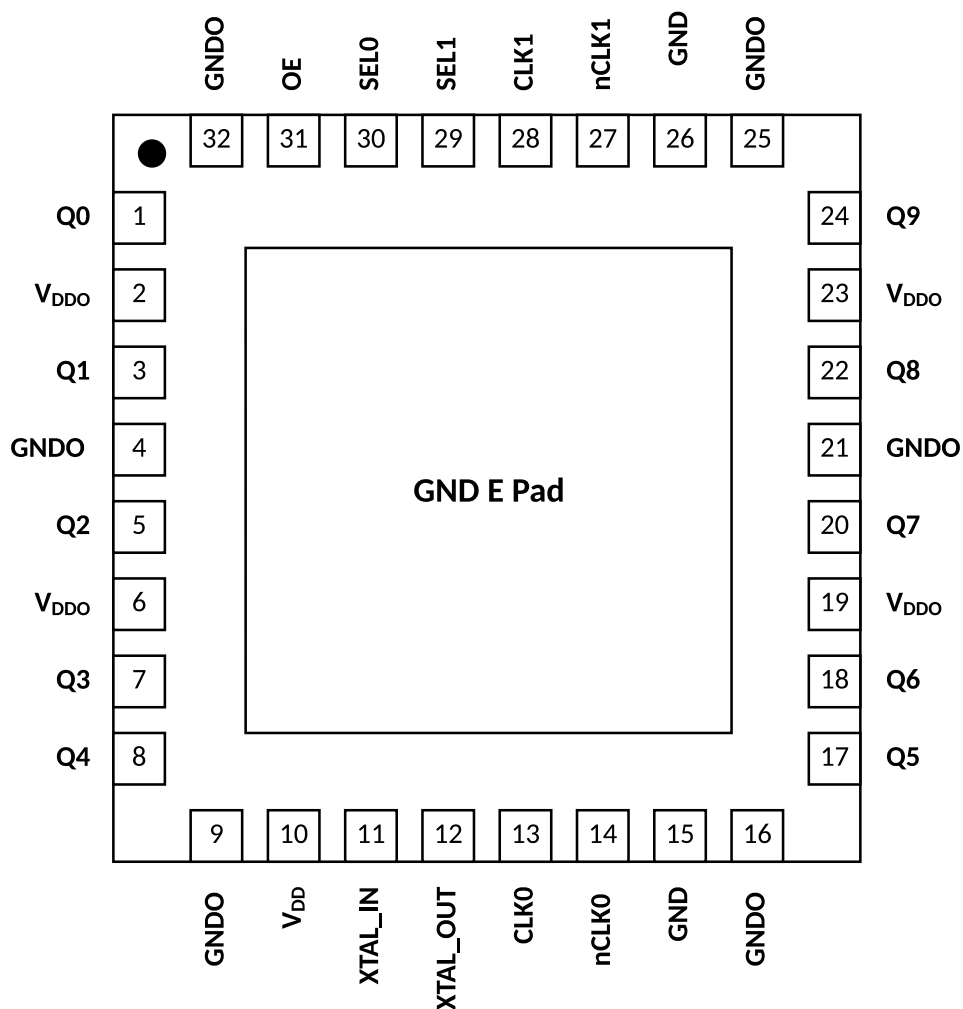


Figure 2. SiT92110 Top View

Table 6. Detailed Pin Description

Pin Name	Pin Number	Functionality SiT92110
Pin group: Clock output pins		
Q0	1	LVCMOS output 0
Q1	3	LVCMOS output 1
Q2	5	LVCMOS output 2
Q3	7	LVCMOS output 3
Q4	8	LVCMOS output 4
Q5	17	LVCMOS output 5
Q6	18	LVCMOS output 6
Q7	20	LVCMOS output 7
Q8	22	LVCMOS output 8
Q9	24	LVCMOS output 9

SiT92110 10 Output, LVCMOS, Ultra Low Jitter Buffer

Pin Name	Pin Number	Functionality SiT92110
Pin group: Power pins		
VDDO	2	I/O power pins 3.3/2.5/1.8/1.5 V
VDDO	6	I/O power pins 3.3/2.5/1.8/1.5 V
VDDO	19	I/O power pins 3.3/2.5/1.8/1.5 V
VDDO	23	I/O power pins 3.3/2.5/1.8/1.5 V
VDD	10	Line supply 3.3/2.5/1.8 V - SiT92110 can support 1.8 V on line supply
GNDO	9	Ground
GND	15	Ground
GNDO	16	Ground
GNDO	4	Ground
GNDO	21	Ground
GND	26	Ground
GNDO	25	Ground
GNDO	32	Ground
Pin group: Clock input Pins		
XTAL_IN	11	Input for crystal. It can be over driven by an ac-coupled single ended clock in crystal over drive mode. In the external bypass mode, the max voltage at the pin needs to be 1.8 V. If the driver is swinging to say 3.3 V rail, then a resistor divider is needed on PCB to restrict the swing at XTAL_IN to 1.8 V Cload supported 6 pF to 10 pF, frequency 8 MHz to 50 MHz
XTAL_OUT	12	crystal oscillator pin
CLK0	13	Non-inverting differential or single-ended primary input
nCLK0	14	Inverting differential primary input
nCLK1	27	inverting differential secondary input
CLK1	28	Non-Inverting differential or single ended secondary input
Pin group: Control Pins		
SEL1	29	Input clock select 1
SEL0	30	Input clock select 0
OE	31	Output enable

SiT92110 10 Output, LVCMOS, Ultra Low Jitter Buffer**Functional Description**

The SiT92110 is a 10-output differential clock fan out buffer with low additive jitter that can operate up to 250 MHz. It features a 3:1 input multiplexer with an optional crystal oscillator input and ten LVCMOS output. The input selection and output buffer modes are controlled via pin strapping. The device is offered in a 32 pin QFN package.

VDD and VDDO Power Supplies

The SiT92110 has separate 3.3 V/2.5 V/1.8 V core (VDD) and 3.3 V/2.5 V/1.8 V/1.5 V output power supply (VDDO). Output supply operation at 2.5 V/1.8 V/1.5 V enables lower power consumption and output-level compatibility with 2.5 V/1.8 V/1.5 V receiver devices. The output levels LVCMOS (VOH) is referenced to its respective VDDO supply.

Clock Inputs

The input clock can be selected from primary universal clock input, secondary universal clock input, or Xin. Clock input selection is controlled using the SEL[1:0] inputs as shown in [Table 7](#).

Table 7. Input Clock Selection

SEL[1]	SEL[0]	Selected Clock
0	0	CLK0
0	1	CLK1
1	0	Crystal Or Crystal bypass AC coupled mode
1	1	Crystal bypass DC coupled mode

Clock States (Input vs Output States)**Table 8. Input versus Output Stages**

State of Selected Clock input	Output State
Inputs are floating	Logic low
Inputs are logic low	logic low
Inputs are logic high	logic high

Output Enable

Pulling OE to LOW, forces the outputs to the high-impedance state after the four falling edge of the input signal. The outputs remain in the high-impedance state as long as OE is LOW. The OE signal is internally synchronized to the selected input clock. This allows disabling the output clock at the falling edge of input clock in a glitch free manner.

When OE goes from low to high, the output clock is enabled within a time delay t_d , where t_d is given by the following equation.

$$t_{d,refout_en} = 0.5n + 4 * T_{in}.$$

T_{in} is the time period of the input clock.

Table 9. OE Functionality

OE	Output State
0	Disabled (HiZ)
1	Enabled

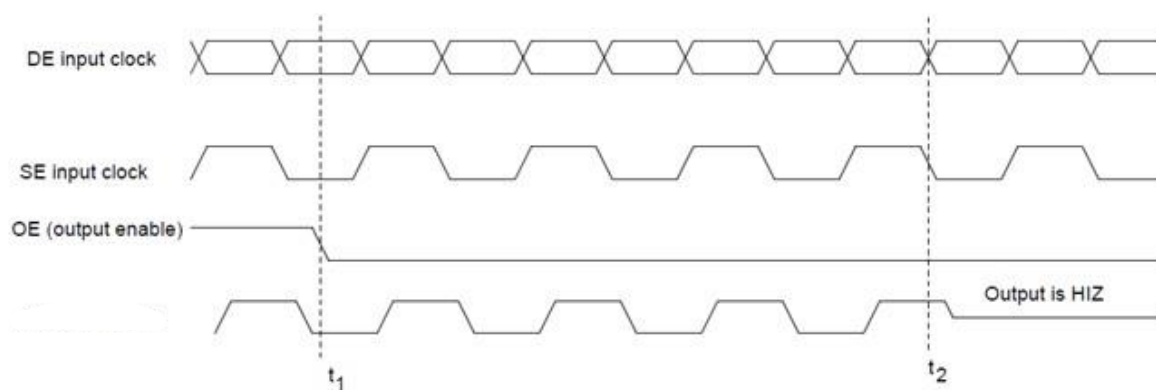


Figure 3. OE: Output disable.

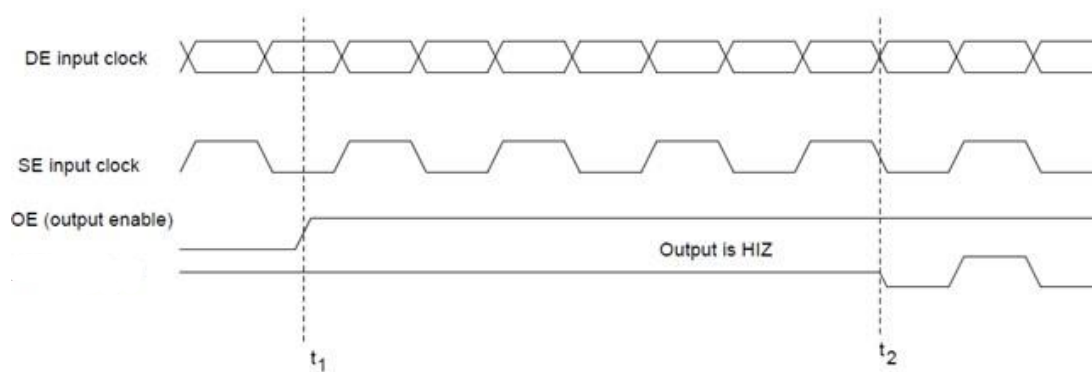


Figure 4. OE: Output enable.

SiT92110 10 Output, LVCMOS, Ultra Low Jitter Buffer**Application Information****Driving the Clock Inputs**

The SiT92110 has two universal clock inputs (CLK0/nCLK0 and CLK1/nCLK1). SiT92110 can accept 3.3 V/2.5 V LVPECL, LVDS, CML, SSTL, and other differential and single-ended signals that meet input common mode, slew rate and swing requirements specified in the Electrical Characteristics. The SiT92110 supports a wide common mode voltage range and input signal swing.

To achieve the best possible phase noise and jitter performance, it is mandatory for the input to have high slew rate of 2 V/ns (differential) or higher. Driving the input with a lower slew rate will degrade the noise floor and jitter.

It is recommended to drive the input signal differentially for better slew rate and jitter. The user can also drive a single ended clock. If the user is driving the single ended clock signal on say CLK0, then nCLK0 pin need to be connected to a 0.1 uF capacitor on the PCB.

Driving Clock Inputs with LVCMOS Driver (AC coupled)

Figure 5 shows how a differential input can be wired to accept LVCMOS single ended levels in AC coupled mode. The bypass capacitor (C1) is used to help filter noise on the DC bias on the inverting pin of the clock input. This bypass should be located as close to the input pin as possible. Two resistors R_{T1} and R_{T2} set the common mode voltage at the output of the LVCMOS driver to $VDD/2$. This prevents average DC leakage current from the LVCMOS driver and avoids unnecessary power dissipation.

For example, if the input clock is driven from a single-ended 2.5 V LVCMOS driver and the DC offset (or swing center) of this signal is 1.25 V, the R_{T1} and R_{T2} values should be adjusted to set the V1 at 1.25 V. This configuration requires

that the sum of the output impedance of the driver (R_o) and the series resistance (R_s) equals the transmission line impedance. In addition, matched termination at the input

will attenuate the signal in half. This can be done in the following way. First, R_{T1} and R_{T2} in parallel should equal the transmission line impedance. For most 50 Ω applications, R_{T1} and R_{T2} can be 100 Ω .

$$Z_o = R_o + R_s = 50 \Omega$$

$$\frac{R_{T1} * R_{T2}}{R_{T1} + R_{T2}} = 50 \Omega$$

$$\frac{VDD * R_{T2}}{R_{T1} + R_{T2}} = \frac{VDD}{2}$$

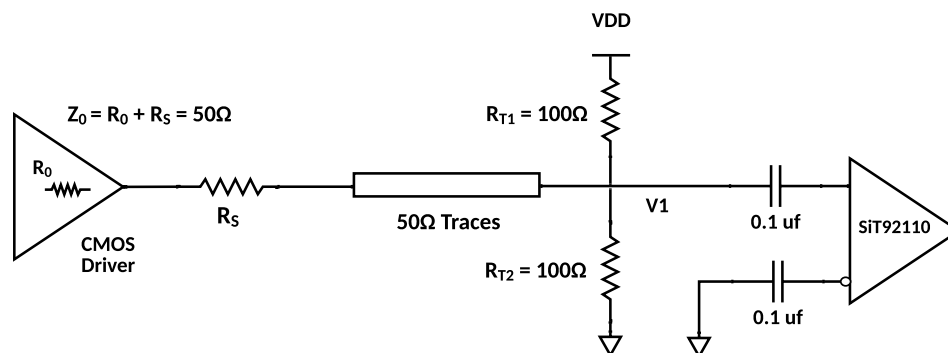


Figure 5. AC coupling LVCMOS clock to SiT92110

SiT92110 10 Output, LVCMOS, Ultra Low Jitter Buffer

The inverting differential input can be connected to a 0.1 uF bypass capacitor. This pin is biased internally to a voltage close to VDD/2.

connected in series with the LVCMOS clock source to prevent DC leakage current.

Another variant of the AC coupling of LVCMOS input clock is shown in Figure 6. We use single termination resistor of 50 Ω to ground. A 0.1 uF AC coupling capacitor is

$$Z_o = R_o + R_s = 50 \Omega$$

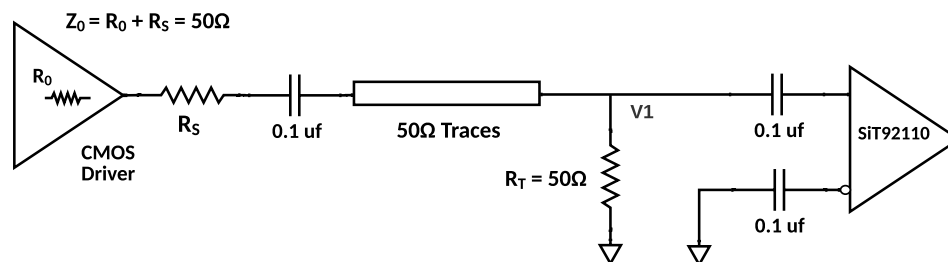


Figure 6. AC coupling of LVCMOS clock with single 50 Ω resistor termination to ground

Driving Clock Inputs with LVCMOS Driver (DC coupled)

Figure 7 shows how a differential input can be wired to accept LVCMOS single ended clock signals in DC coupled mode. The reference voltage $V1 = VDD/2$ is generated by the bias resistors R_{S1} and R_{S2} . The bypass capacitor (C1) is used to help filter noise on the DC bias. This bias circuit should be located as close to the input pin as possible. The ratio of R_{S1} and R_{S2} might need to be adjusted to position the bias voltage $V2$ in the center of the input voltage swing. Typical values of bias circuit resistance are $R_{S1} = 1 \text{ K}\Omega$ and $R_{S2} = 1 \text{ K}\Omega$

$$Z_o = R_o + R_s = 50 \Omega$$

$$\frac{VDD * R_{S2}}{R_{S1} + R_{S2}} = \frac{VDD}{2}$$

$$\frac{R_{T1} * R_{T2}}{R_{T1} + R_{T2}} = 50 \Omega$$

$$\frac{VDD * R_{T2}}{R_{T1} + R_{T2}} = \frac{VDD}{2}$$

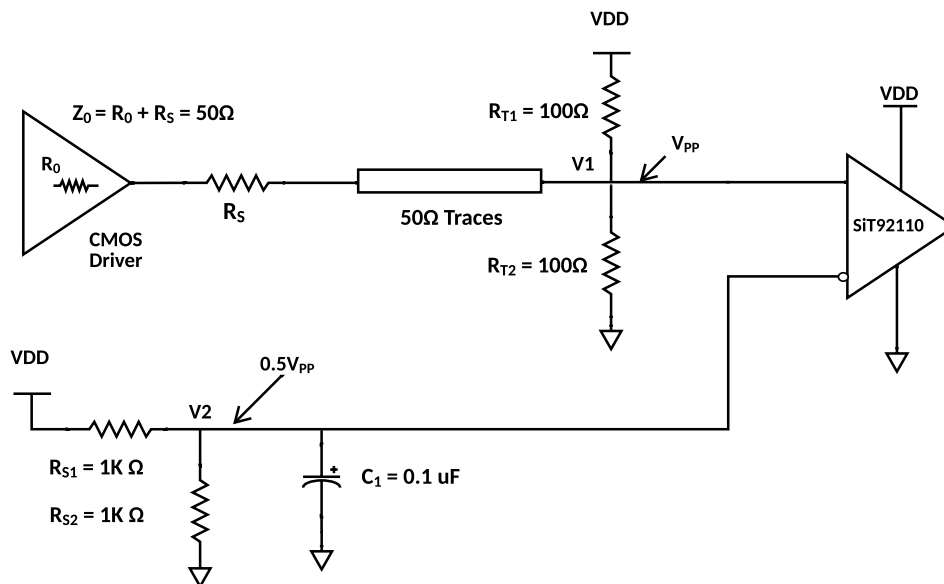


Figure 7. DC coupling of LVCMOS clock to SiT92110 – configuration 1

For example, if the input clock is driven from a single-ended 2.5 V LVCMOS driver and the DC offset (or swing center) of this signal is 1.25 V, the R_{S1} and R_{S2} values should be adjusted to set the V_2 at 1.25 V. The values below are for when both the single ended swing and VDD are at the same voltage.

This configuration requires that the sum of the output impedance of the driver (R_o) and the series resistance (R_s) equals the transmission line impedance. In addition, matched termination at the input will attenuate the signal in half. This can be done in one of two ways. First, R_{T1} and R_{T2} in parallel should equal the transmission line impedance. For most 50 Ω applications, R_{T1} and R_{T2} can be 100 Ω . The values of the resistors can be increased to reduce the loading for slower and weaker LVCMOS driver.

Figure 8 shows a second input clock configuration where R_{T1} , R_{T2} are removed and replaced with a 50 Ω termination

resistor R_T to ground. It is possible that LVCMOS driver (or clock source) may not be able to drive 50 Ω load in DC coupled mode. The user can use series RC termination to overcome this limitation. The design equations for the input clock configuration shown in Figure 8 is given below

$$Z_o = R_o + R_s = 50 \text{ Ohm}$$

$$\frac{VDD * R_{s2}}{R_{s1} + R_{s2}} = \frac{V_{pp}}{2}$$

The LVCMOS single ended clock input with series RC termination near the buffer is shown in Figure 9. There is a single termination resistor R_T which is connected to ground through a capacitor C_{AC} . The value of series capacitor is given by a formula.

$$C_{AC} \geq \frac{3T_D}{50\Omega}, T_D \text{ is the transmission line delay}$$

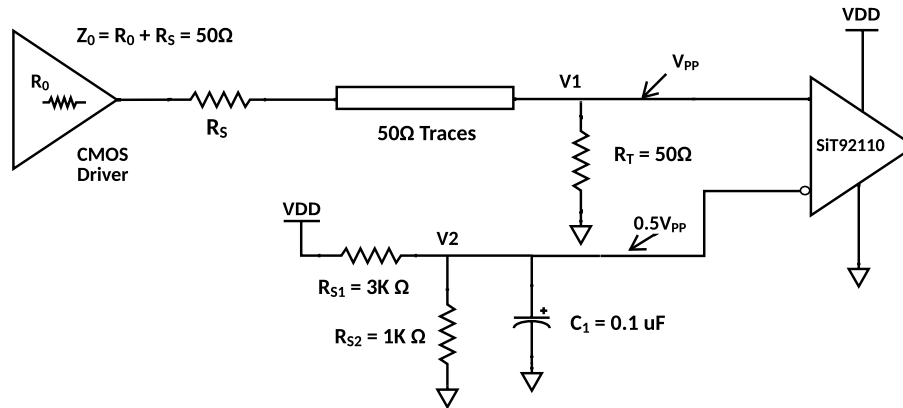


Figure 8. DC coupled LVCMOS input clock configuration – configuration 2

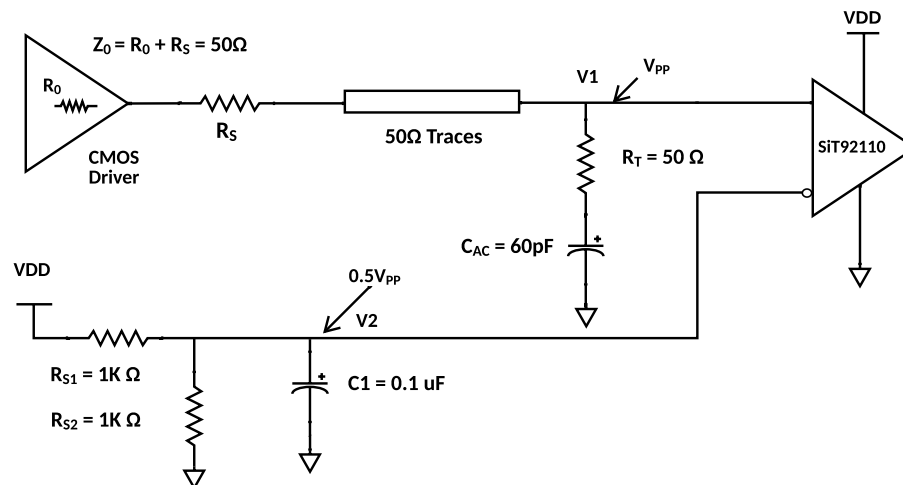


Figure 9. DC coupled LVCMOS input clock with series RC termination – configuration 3

SiT92110 10 Output, LVCMOS, Ultra Low Jitter Buffer

For low frequencies we can direct couple the LVCMOS clock to SiT92110 input clock pin as shown in [Figure 10](#).

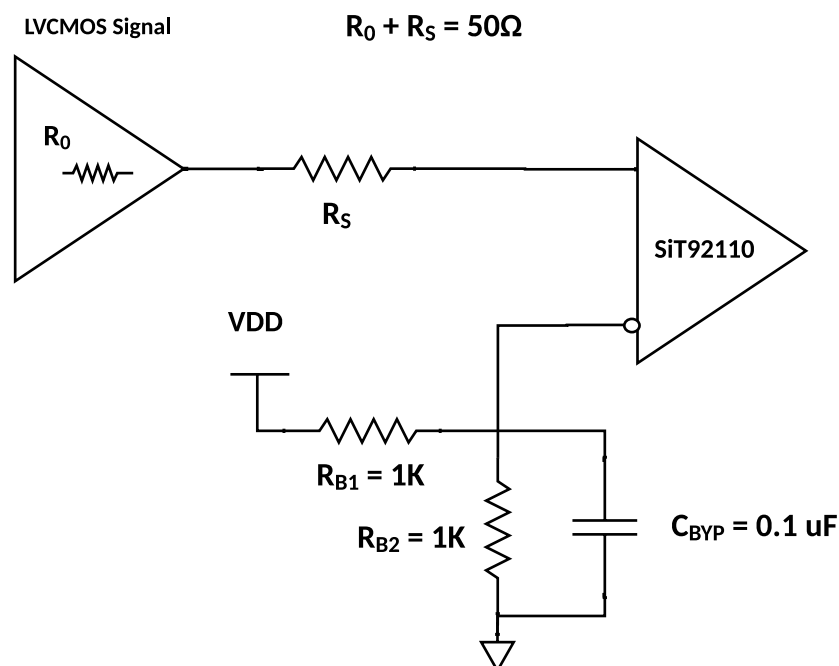


Figure 10. Direct coupling of LVCMOS clock to SiT92110

Driving XTAL_IN with LVCMOS Driver (AC coupled)

The crystal input XTAL_IN can be overdriven with single ended clock (LVCMOS driver or one side of a differential driver). The peak swing at XTAL_IN should be limited to 1.8 V. The XTAL_OUT pin, in this case can be floating. The SEL1, SEL0 should be 2'b10. The maximum voltage at XTAL_IN should not exceed 1.8 V and minimum voltage should not go below -0.5 V. The slew rate at XTAL_IN should be greater than 0.2 V/ns.

For 3.3 V LVCMOS inputs, the amplitude must be reduced from full swing to at least half the swing in order to prevent signal interference with the power rail and to reduce internal noise. [Figure 11](#) shows an example of the interface diagram for a high speed 3.3 V LVCMOS driver. This configuration requires that the sum of the output impedance of the driver

crystal input will attenuate the signal in half. This can be done in one of two ways. First, R_{T1} and R_{T2} in parallel should equal the transmission line impedance. For most 50 Ω applications, R_{T1} and R_{T2} can be 100 Ω .

$$Z_o = R_o + R_s = 50 \text{ Ohm}$$

$$\frac{R_{T1} * R_{T2}}{R_{T1} + R_{T2}} = 50 \text{ Ohm}$$

$$\frac{VDD * R_{T2}}{R_{T1} + R_{T2}} = \frac{VDD}{2}$$

For both the AC coupled configurations, the maximum peak to peak swing before the ac coupling capacitor is 1.8V. The maximum DC bias voltage of XTAL_IN is 0.675V. Therefore the maximum swing at the XTAL_IN pin is given by the equation given below.

$$V_{swing, pk, XTAL_IN} = 0.675 + 0.5 * 1.8 = 1.575V$$

(R_o) and the series resistance (R_s) equals the transmission line impedance. In addition, matched termination at the

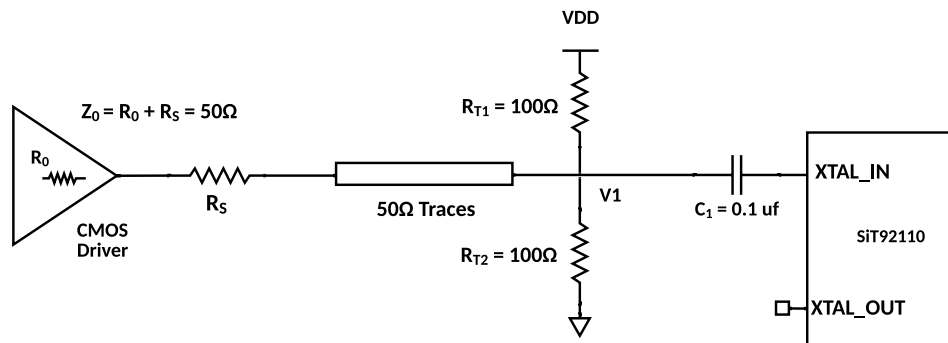


Figure 11. Single ended LVCMOS input – configuration 1, AC coupling to crystal input

Figure 12 shows a second input clock configuration where $RT1$, $RT2$ are removed and replaced with a 50Ω

termination resistor RT to ground. A $0.1\mu F$ is in series with the CMOS driver to prevent any DC leakage current.

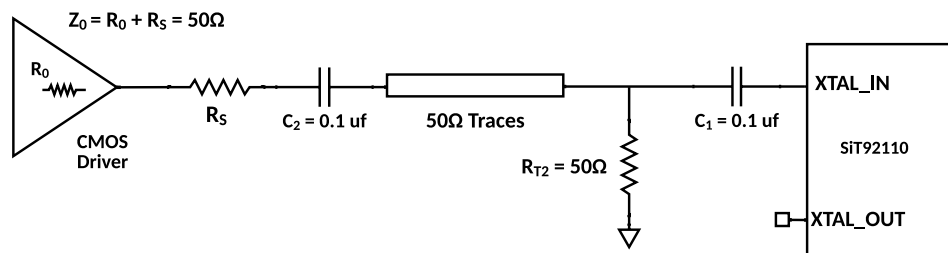


Figure 12. Single ended LVCMOS input – configuration 2, AC coupling to crystal input

Driving XTAL_IN with LVCMOS Driver (DC coupled)

The crystal input XTAL_IN can be overdriven with single ended clock as shown in Figure 13 in DC coupled mode. The peak swing at XTAL_IN should be limited to 1.8 V. The

XTAL_OUT pin, in this case can be floating. The SEL1, SEL0 should be 2'b11. If the LVCMOS driver is on higher supply, say 3.3 V, use a resistor divider on the PCB to scale down the peak output voltage to 1.8 V

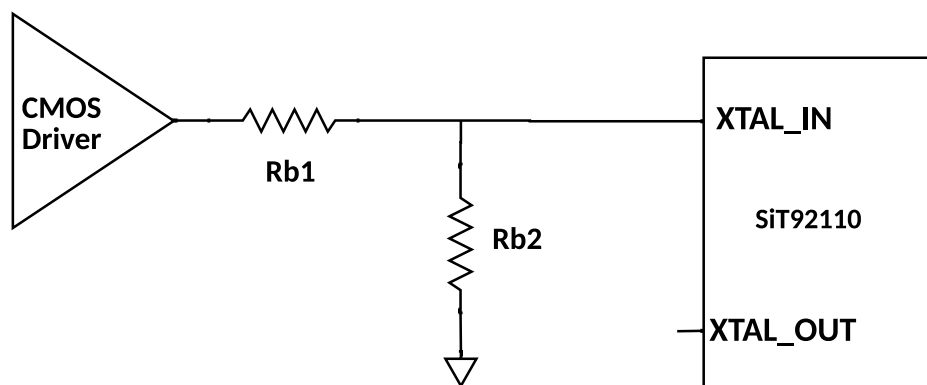


Figure 13. Single ended LVCMOS input, DC coupling to crystal input

LVDS (DC coupled)

Terminate with a differential 100 Ω as close to the receiver as possible. This is shown in [Figure 14](#).

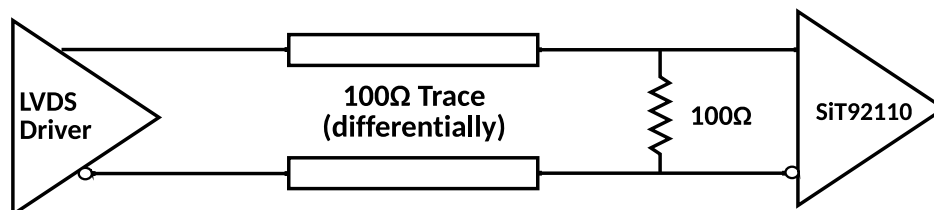


Figure 14. Termination scheme for DC coupled LVDS

HCSL (DC coupled)

Termination resistor is 50 Ω to ground, close to the output driver. A series resistance R_S is sometimes used to limit the

overshoot during fast transients. The termination scheme is shown in [Figure 15](#).

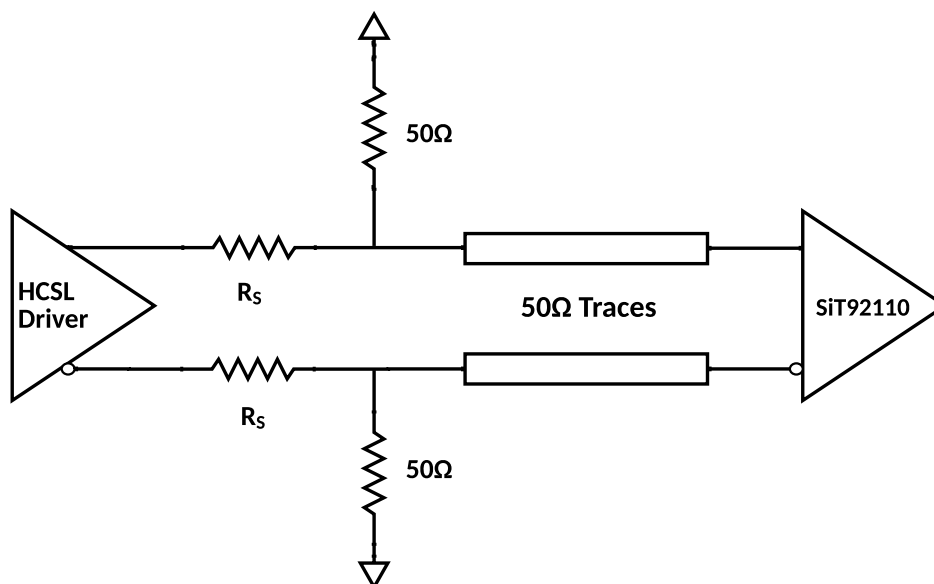


Figure 15. Termination scheme for DC coupled HCSL

LVPECL (DC coupled)

For DC coupled operation, the 50 Ω termination resistors are placed close to the receiver. The termination resistors are biased with a voltage source V_{TT} .

$$V_{TT} = V_{DDO} - 2V.$$

This termination scheme is shown in [Figure 16](#). Alternatively, the user can also implement a Thevenin equivalent of V_{TT} using a resistor divider. This scheme and the values of the resistors in the resistor divider are given in [Figure 17](#).


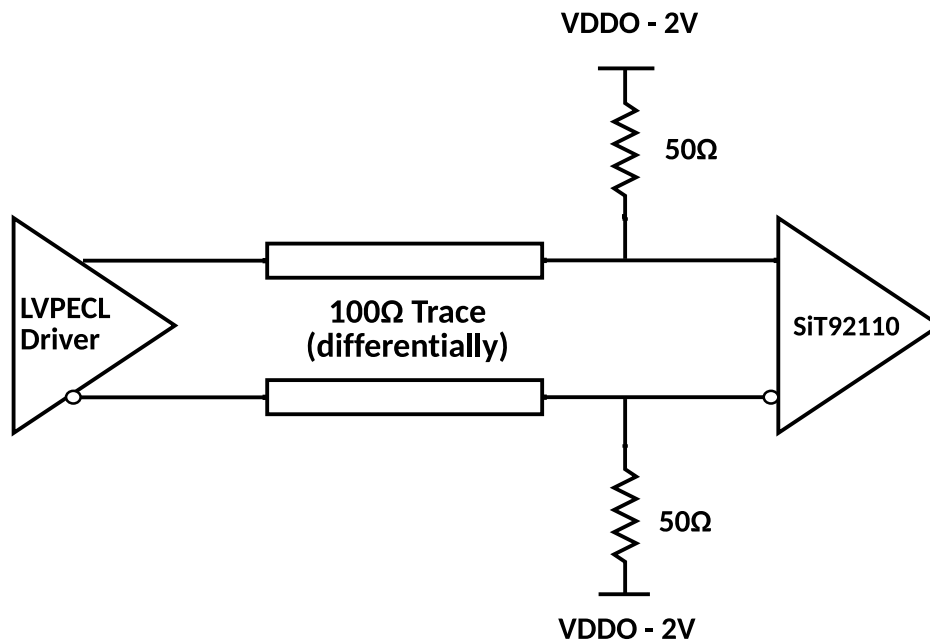


Figure 16. Termination scheme for DC coupled LVPECL.

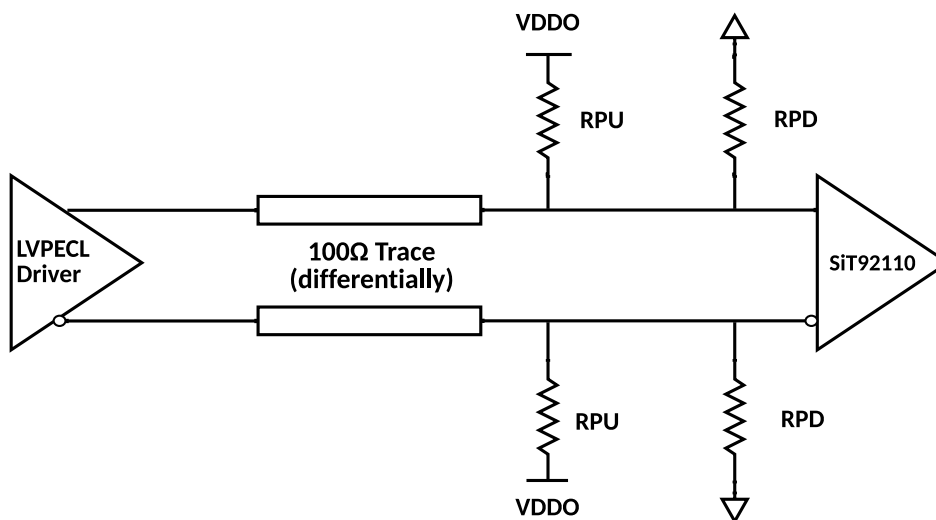

VDDO	RPU	RPD	VTT
3.3 V	120 Ω	82 Ω	~1.3 V
2.5 V	250 Ω	62.5 Ω	0.5 V

Figure 17. Termination scheme for DC coupled LVPECL, Thevenin equivalent

The design equations for the LVPECL Thevenin equivalent termination are given below.

$$\frac{R_{PD} * R_{PU}}{R_{PD} + R_{PU}} = 50\Omega$$

$$\frac{R_{PD} * VDDO}{R_{PD} + R_{PU}} = VDDO - 2V$$

SSTL (DC coupled)

The SSTL input clock configuration is shown in [Figure 18](#). The transmission line impedance is 60 Ω in the application

example given. Therefore, we use two 120 Ω resistors from VDDO to ground for biasing the clock input pins. The effective termination impedance in this case is 60 Ω .

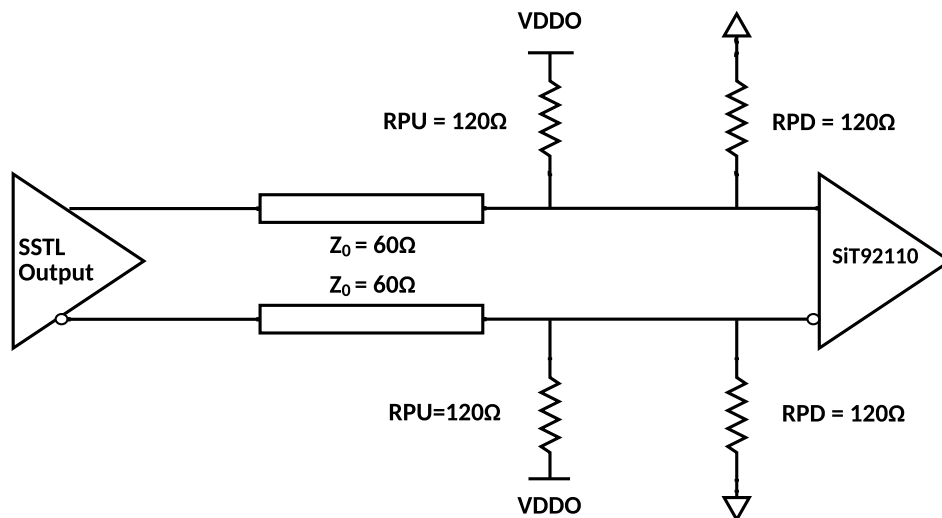


Figure 18. Example of input clock termination for SSTL clock.

LVDS (AC coupled)

The load termination resistor should be placed before the AC coupling capacitors. The load termination resistor and

the AC coupling capacitors should be placed close to the receiver. The termination scheme is shown in [Figure 19](#).

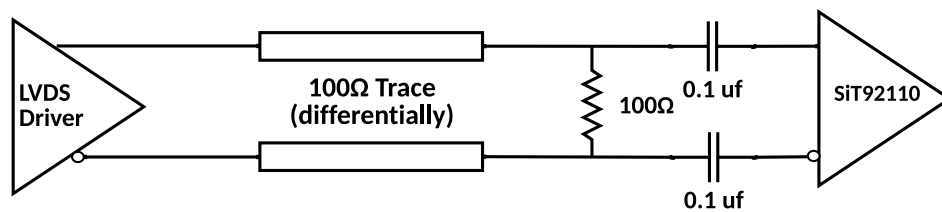


Figure 19. Termination scheme for AC coupled LVDS

SiT92110 10 Output, LVCMOS, Ultra Low Jitter Buffer**LVPECL (AC coupled)**

The LVPECL should have a DC path to ground. So, the user must place a resistance R_T , close to the output driver. The

LVPECL AC coupling and Thevenin equivalent VTT termination scheme is shown in [Figure 20](#)

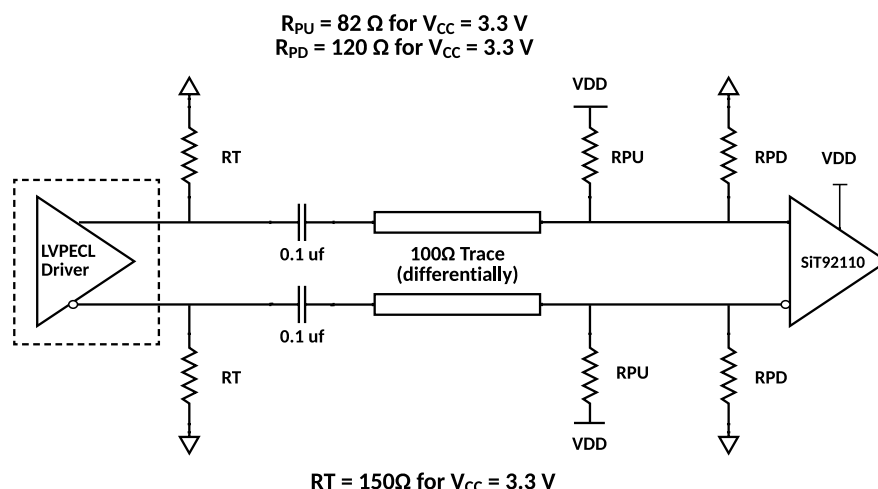


Figure 20. Termination scheme for AC coupled LVPECL, Thevenin Equivalent

The pull up resistance R_{PU} and pull down resistance R_{PD} sets the input common mode voltage for SiT92110.

The value of the input common mode voltage can be estimated by the equation given below

$$V_{ICM} = \frac{VDD * R_{PD}}{R_{PU} + R_{PD}} = \frac{3.3 * 120}{120 + 82} = 1.961V$$

The differential input common mode specification of SiT92110 (from data sheet) is $VDD - 1.1 = 2.2 V$, therefore the input common mode set by LVPECL AC coupled

termination meets the SiT92110 input common mode specification.

The LVPECL driver chip has resistance R_T providing DC path for the output driver current in the LVPECL driver.

The effective load impedance at the input side of SiT92110 (receiver side) is formed by parallel combination of R_{PU} , R_{PD} .

The effective termination resistor value is given by the equation below

$$R_{termination} = \frac{R_{PU} * R_{PD}}{R_{PU} + R_{PD}} = \frac{120 * 82}{120 + 82} = 48.7 \Omega$$

Termination of Output Driver of SiT92110 for Various Load Configurations

SiT92110 Output ODR Termination for AC Coupled mode

AC coupling of SiT92110 LVCMOS output driver is shown in [Figure 21](#). We use single termination resistor of 50Ω s to ground. A $0.1 \mu F$ AC coupling capacitor is connected in series with the LVCMOS clock source to prevent DC leakage current. The receiver side is terminated with a single 50Ω resistance to ground. The clock signal is then

AC coupled to the receiver, in this example. C_1 is a bypass capacitor that is used to suppress noise on the inverting differential input of the receiver.

$$Z_o = R_o + R_s = 50 \Omega$$

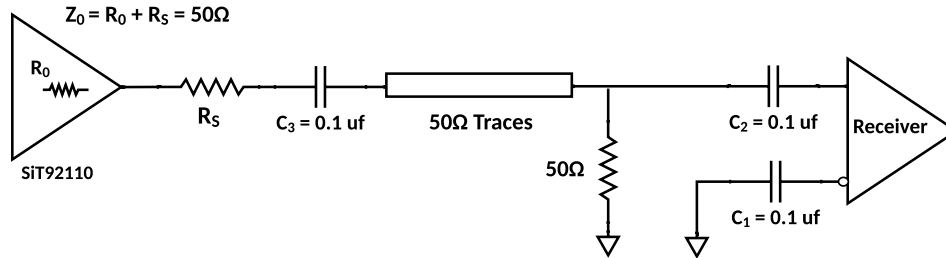


Figure 21. AC coupling of LVCMOS clock with single 50 Ω resistor termination to ground

SiT92110 Output ODR Termination for DC Coupled mode

Figure 22 shows how SiT92110 LVCMOS output drive can be terminated to send clock signals in DC coupled mode. The reference voltage $V1 = VDD/2$ is generated by the bias resistors $RS1$ and $RS2$. The bypass capacitor ($C1$) is used to help filter noise on the DC bias. This bias circuit should be located as close to the input pin as possible. The ratio of $RS1$ and $RS2$ might need to be adjusted to position the bias voltage $V2$ in the center of the input voltage swing.

$$\frac{VDD * RS2}{RS1 + RS2} = \frac{VDD}{2},$$

Typical value of $RS1 = RS2 = 1K\Omega$

$$\frac{RT1 * RT2}{RT1 + RT2} = 50 \text{ Ohm},$$

Typical value of $RT1 = RT2 = 100\Omega$

$$Z_o = R_o + R_s = 50 \text{ Ohm}$$

$$\frac{VDD * RT2}{RT1 + RT2} = \frac{VDD}{2}$$

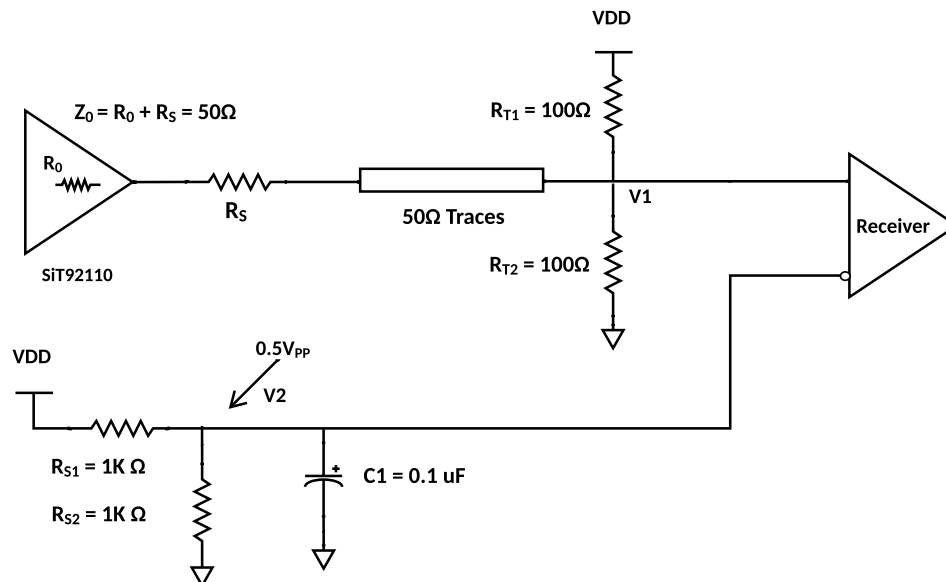


Figure 22. DC coupling of LVCMOS output clock termination – configuration 1

For example, if the SiT92110 supply is 2.5 V then the DC offset (or swing center) of this signal is 1.25 V, the R_{S1} and R_{S2} values should be adjusted to set the V2 at 1.25 V. The values below are for when both the single ended swing and VDD are at the same voltage.

This configuration requires that the sum of the output impedance of the driver (R_o) and the series resistance (R_s) equals the transmission line impedance. In addition, matched termination at the input will attenuate the signal in half. This can be done in one of two ways. First, R_{T1} and R_{T2} in parallel should equal the transmission line impedance. For most 50 Ω applications, R_{T1} and R_{T2} can be 100 Ω . The values of the resistors can be increased to reduce the loading for slower and weaker LVCMOS driver.

Figure 23 shows a second input clock configuration where R_{T1} , R_{T2} are removed and replaced with a 50 Ω termination resistor R_T to ground. There will be DC leakage current from SiT92110, for the output termination shown in Figure 23.

The user can use series RC termination to overcome this limitation. The design equations for the input clock configuration shown in Figure 23 is given below

$$Z_o = R_o + R_s = 50 \Omega$$

$$\frac{VDD * R_{S2}}{R_{S1} + R_{S2}} = \frac{V_{pp}}{2} = \frac{VDD}{4},$$

$$\text{Typical value of } R_{S1} = 3K\Omega, R_{S2} = 1K\Omega$$

The SiT92110 LVCMOS output driver termination with series RC termination near the buffer is shown in Figure 24. There is a single termination resistor R_T which is connected to ground through a capacitor C_{AC} . The value of series capacitor is given by a formula.

$$C_{AC} \geq \frac{3T_D}{50\Omega}, T_D \text{ is the transmission line delay}$$

Typical value for C_{AC} is 60 pF, assuming delay of $T_D = 200$ ps/inch and 5 inch input clock route length.

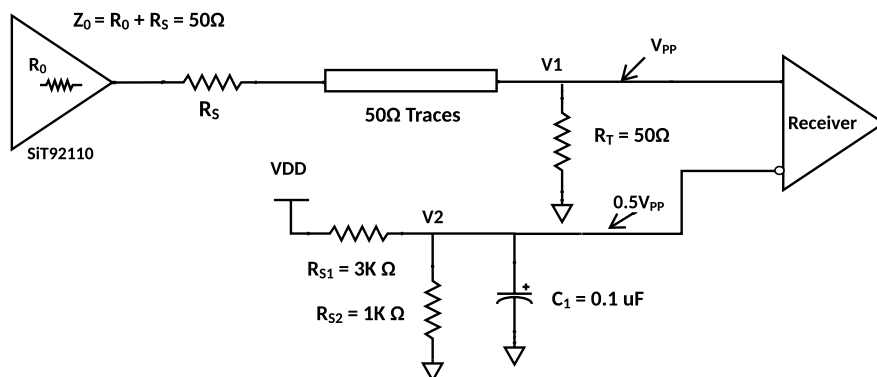


Figure 23. DC coupled LVCMOS output clock configuration – configuration 2

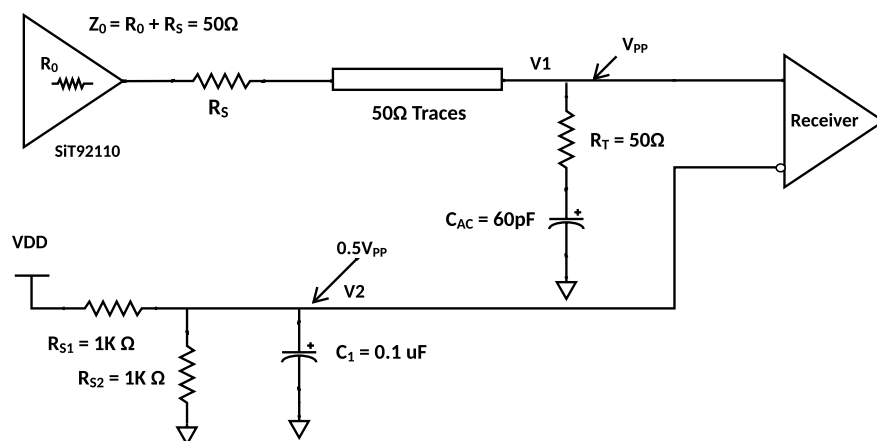


Figure 24. DC coupled LVCMOS output clock with series RC termination – configuration 3

The typical value of R_{S1} and R_{S2} in this case is 1 K Ω and that of C_{AC} is 60 pF.

CMOS (Capacitive load)

The capacitive load can be driven as shown in Figure 25. $R_s = 33\ \Omega$ for $VDDO = 3.3\text{ V}$.

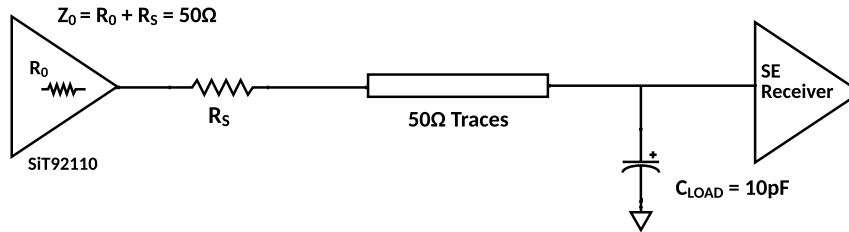


Figure 25. Typical application load

Power Considerations

The following power consideration refers to the device-consumed power consumption only. The device power consumption is the sum of static power and dynamic power. The dynamic power usage consists of two components:

- Power used by the device as it switches states
- Power required to charge any output load. The output load can be capacitive-only or capacitive and resistive. Use the following formula to calculate the power consumption of the device:

$$P_{DEV} = P_{STATIC} + P_{DYNAMIC} + P_{CLOAD}$$

$$P_{STATIC} = I_{CORE_STATIC} * VDD + I_{ODR_STATIC} * VDDO$$

$$P_{DYNAMIC} = I_{CORE_DYNAMIC_100MHZ} * VDD * \frac{F_{in}(\text{units in MHz})}{100} + C_{PD} * 10 * F_{in} * VDDO^2$$

$$P_{CLOAD} = C_{LOAD} * 10 * F_{in} * VDDO^2$$

Let us calculate typical power dissipation for C_{LOAD} of 2 pF at input clock of 100 MHz. Assume that $VDD = VDDO = 3.3\text{ V}$.

$$P_{STATIC} = 16\text{mA} * 3.3\text{V} + 3.5\text{mA} * 3.3\text{V} = 64.35\text{mW}$$

$$P_{DYNAMIC} = 1.5\text{mA} * \frac{100}{100} * 3.3\text{V} + 4.0\text{pF} * 1 * 100\text{MH} * 3.3\text{V} * 3.3\text{V} = 48.51\text{mW}$$

$$P_{CLOAD} = 2\text{pF} * 10 * 100\text{MHz} * 3.3\text{V} * 3.3\text{V} = 21.78\text{mW}$$

Core Current in XO Mode

The crystal mode standalone block current is measured in ATE. We can calculate total VDD core current in crystal mode, in typical condition using the below equation. The worst case VDD core current will be 14 mA, in crystal mode.

$$I_{core_crystal} = 8.5 + I_{xo_standalone} = 11.5mA, typical$$

$$P_{DEV} = 134.64mW$$

Parameter Measurement Information**Differential Input Level**

The parameter definitions related to differential input level is shown in [Figure 26](#).

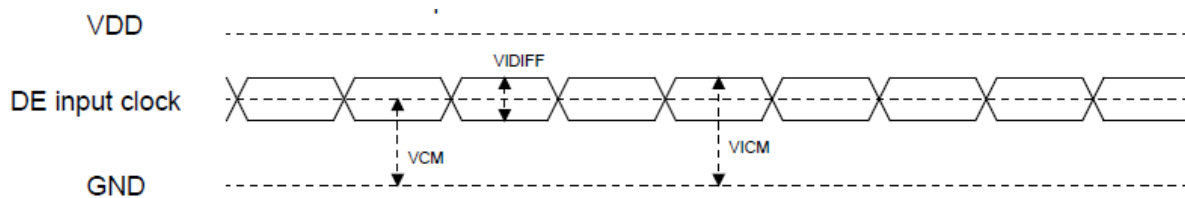


Figure 26. Parameters related to differential input level

Skew and Input to Output Delay

The parameter definitions related to propagation delay and skew are shown in [Figure 27](#).

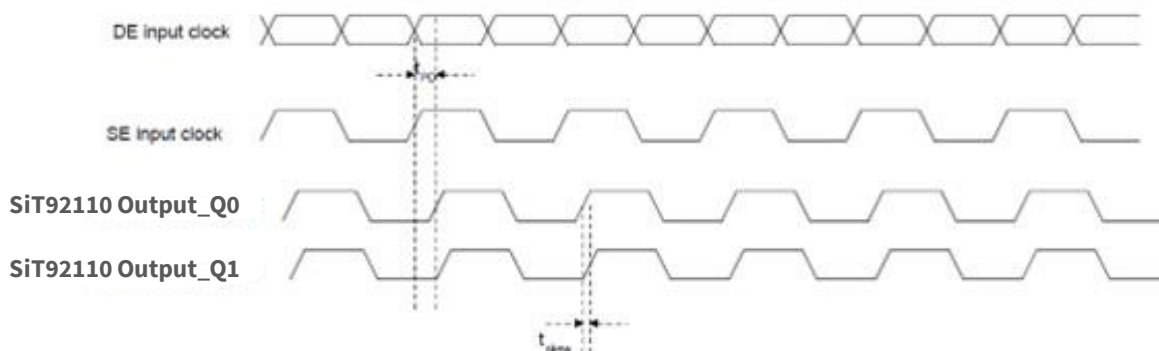


Figure 27. Parameter definitions of propagation delay and skew

Rise and Fall Times

The parameter definitions related to propagation rise and fall times are shown in [Figure 28](#).

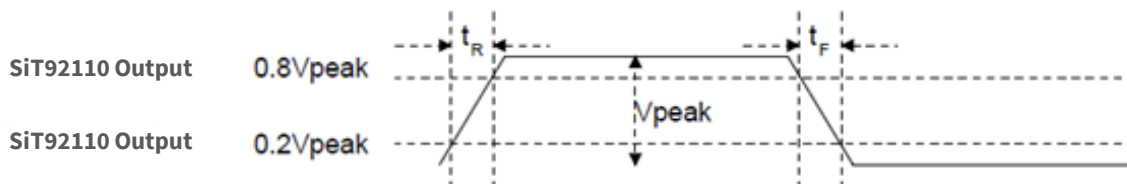


Figure 28. Parameter definitions related to rise and fall times

Isolation

Isolation is a measure of the coupling of clock toggling in unselected input clock path on the output clock. Let us say that CLOCK0 path is selected and there the clock frequency is 156.5 MHz at 0 dBm power. If a clock is toggling in CLOCK1 path at 156 MHz at 0 dBm, then we there may be a tone at an offset of 0.5 MHz from the carrier, in the output clock. The power of this tone with respect to the carrier is called isolation.

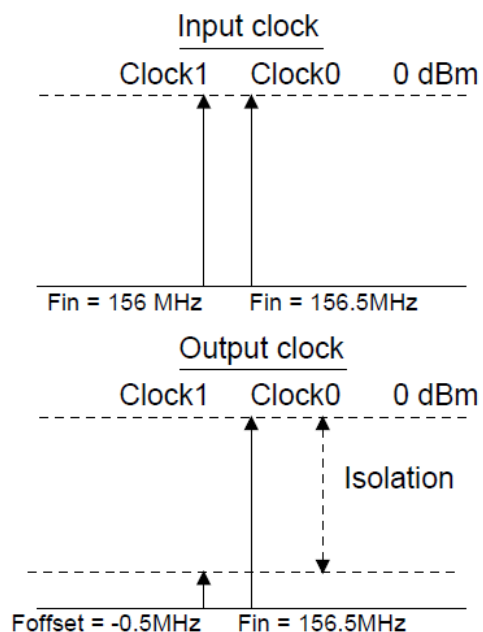


Figure 29. Parameter definition of isolation

Thermal Information**Table 10. Thermal Metrics of SiT92110**

Thermal Metric	SiT92110 RHB 32 pins	Units
θ_{JA} Junction to ambient thermal resistance, flow = 0 m/s	43.4	°C/W
θ_{JA} Junction to ambient thermal resistance, flow = 1 m/s	38.7	°C/W
θ_{JA} Junction to ambient thermal resistance, flow = 2 m/s	37.4	°C/W
θ_{JB} Junction to board	16.62	°C/W
θ_{JC} Junction to case	23.7	°C/W
ψ_{JT} Junction to top characterization parameter	0.75	°C/W

HOT Swap Recommendations

Introduction

Hot-swap is a term used to refer to the insertion and removal of a dSighter card from a backplane without powering down the system power. With today's high speed data and redundancy requirements, many systems are required to run continuously without being powered down. If special considerations are not taken, the device can be damaged.

Typical Differential Input Clock

For example, [Figure 30](#) shows a typical LVPECL driver and differential input. If the power of the driver (VDDO) is turned on before the input supply (VDDI), there is a possibility that the input current could exceed the limit and damage diode D1.

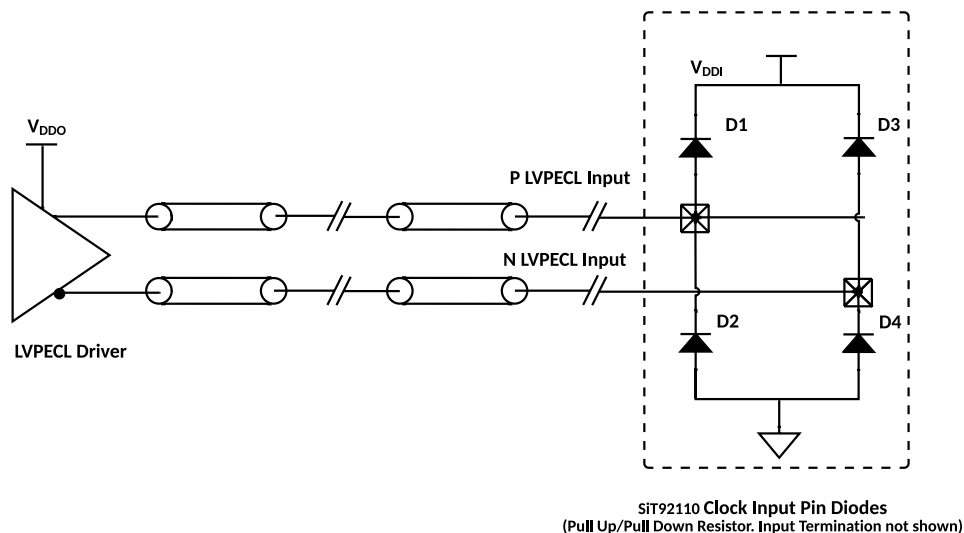


Figure 30. Typical input differential clock

To ensure the input current does not exceed its limit and damage the device, a current limiting resistor can be used. Below are examples of the most common termination topologies using a series current limiting resistor. Though it's not necessary, but if board space allows, some of the

examples have an optional 100pf capacitor which assists with the integrity of the rise time. It is also recommended that the current limiting resistor be as close to the receiver as possible.

Input Clock Termination with Hot Swap Protection

LVPECL Termination Example

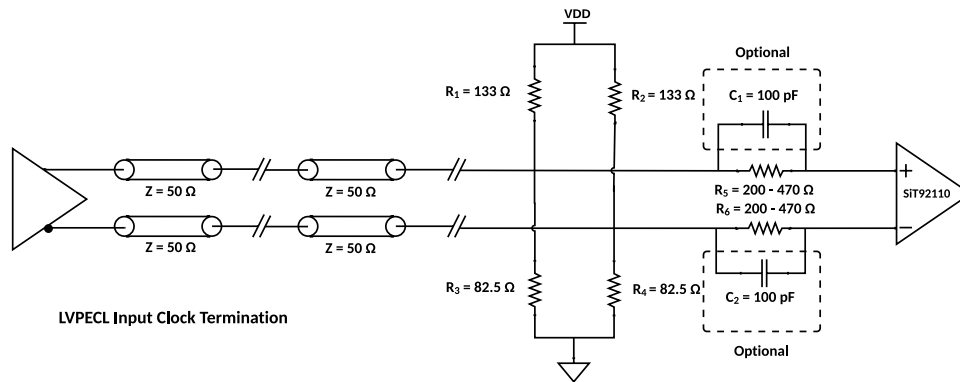


Figure 31. LVPECL termination with hot swap protection

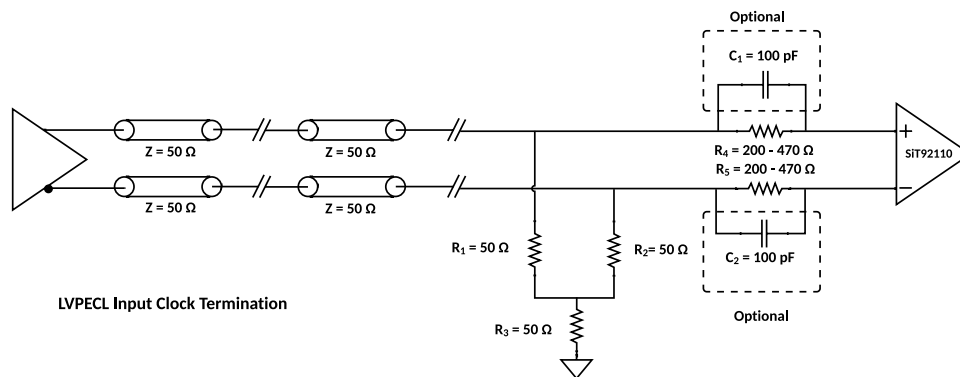
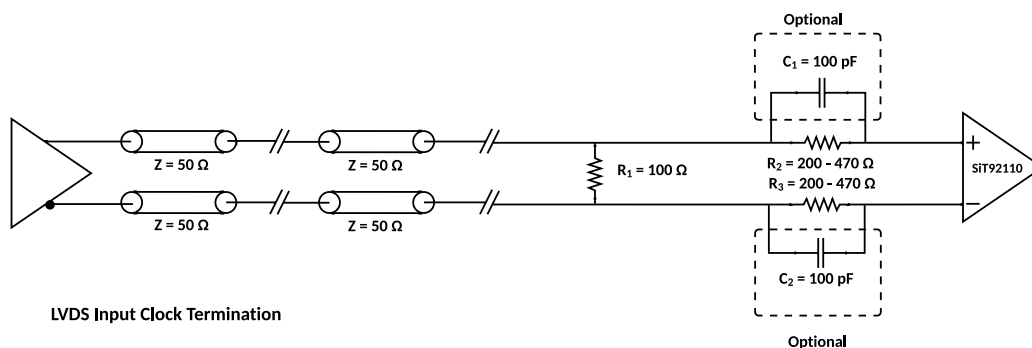
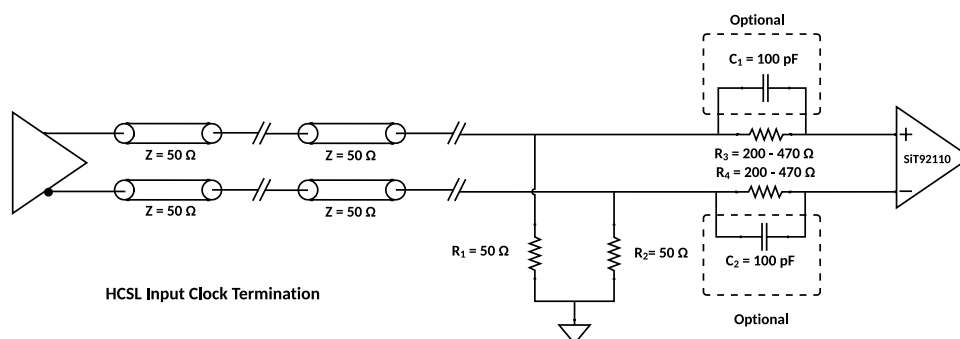
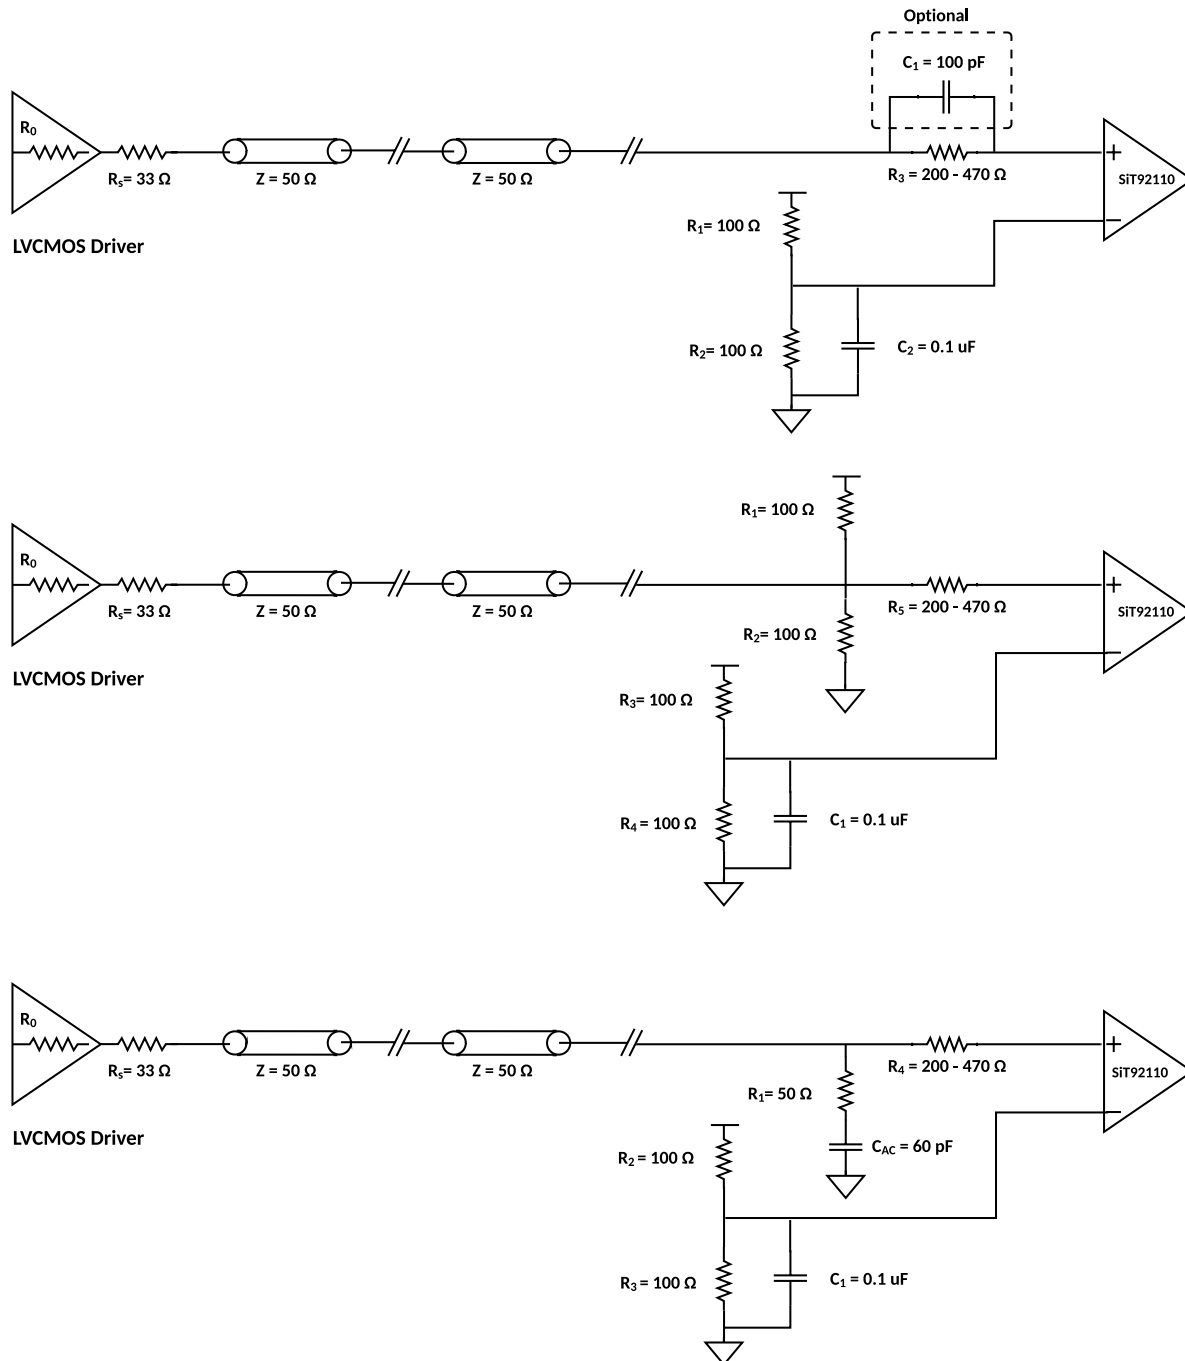
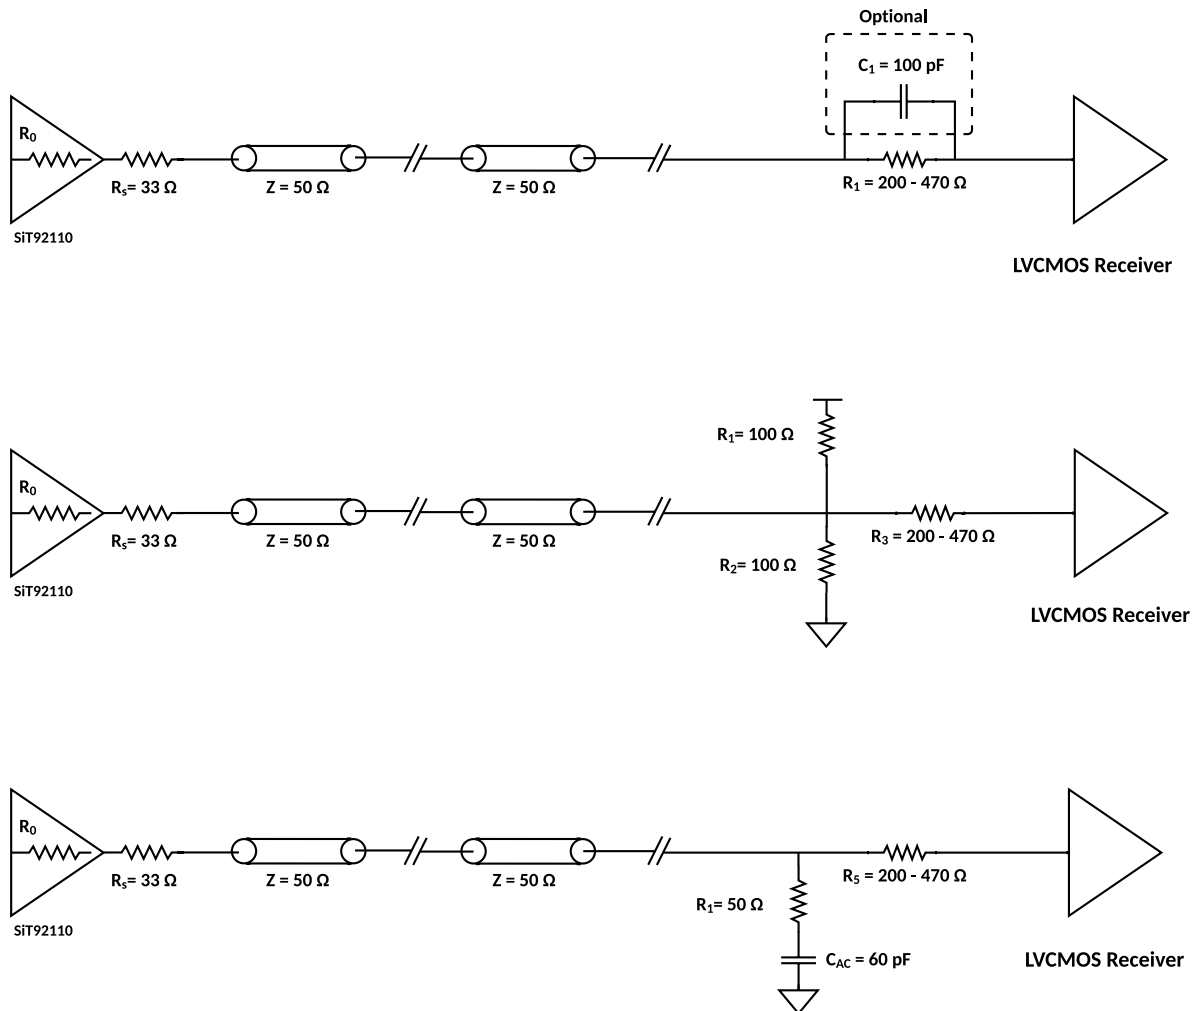


Figure 32. LVEPCL termination with hot swap protection

LVDS Input Clock Termination Example**Figure 33. LVDS termination with hot swap protection****HCSL Input Clock Termination Example****Figure 34. HCSL termination with hot swap protection**

LVCMOS Input Clock Termination with Hot Swap Protection**Figure 35. LVCMOS input clock termination with hot swap protection**

LVCMOS Output Clock Termination with Hot Swap Protection**Figure 36. Different types of LVCMOS output clock termination with hot swap protection**

Operation in Multiple VDDO Supply Domains

The VDDO pins, 2 and 6 on the left side are shorted internally. These pins along with ODR Q0 to Q4 belong to a single supply domain. The VDDO pins, 23 and 19 on the left side are shorted internally. These pins along with ODR Q5 to Q9 belong to a single supply domain. These two supply

domains are totally independent of each other. Pin 2, 6 can be connected to say 3.3 V while pin 23, 19 can be connected to 1.8 V. In this example, Q0 to Q4 will be 3.3 V LVCMOS driver. Q5 to Q9 will be 1.8 V LVCMOS driver.

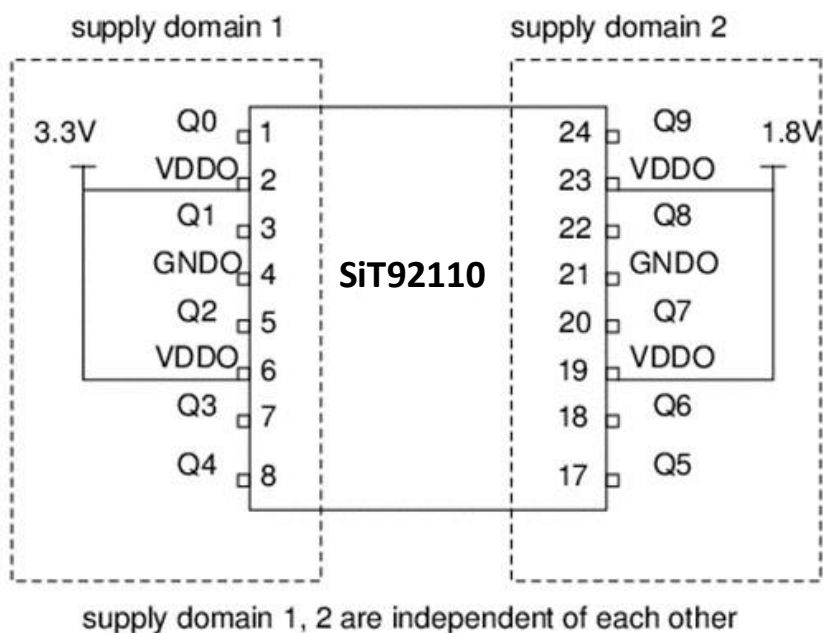
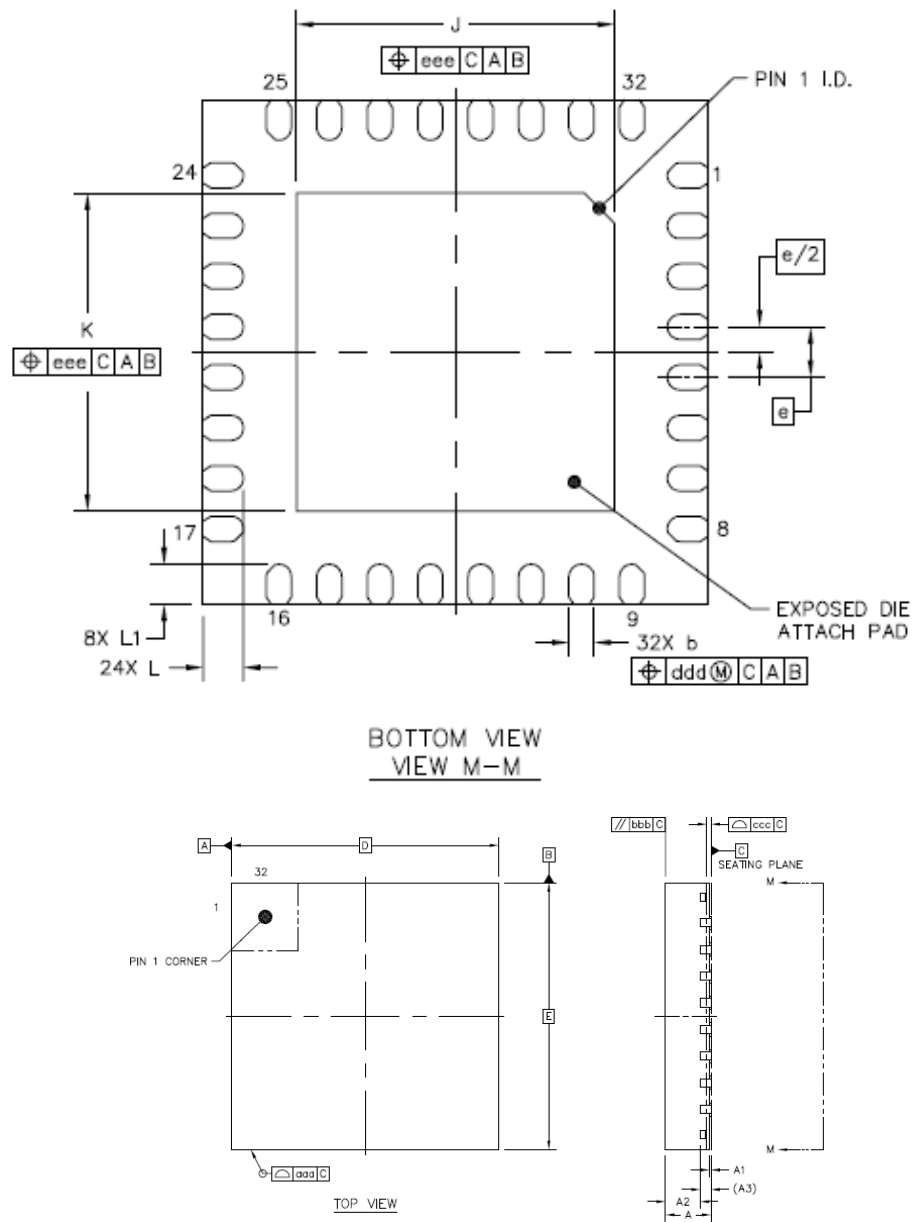
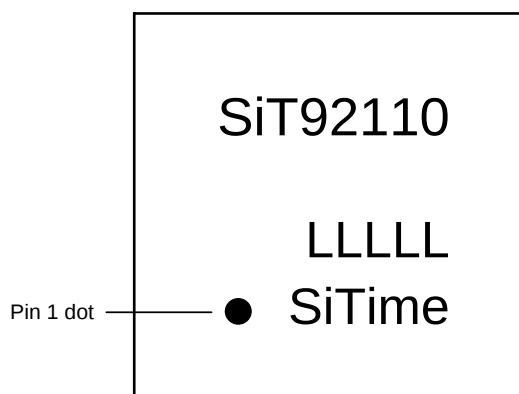


Figure 37. Example of multi supply operation of SiT92110

Package Dimensions and Patterns**Figure 38. SiT92110 32 pin QFN package dimensions**

		SYMBOL	MILLIMETER		
			MIN	NOM	MAX
Total Thickness		A	0.8	0.85	0.90
Stand Off		A1	0	0.035	0.05
Mold Thickness		A2	-	0.65	-
L/F Thickness		A3	0.203 REF		
Lead Width		b	0.2	0.25	0.3
Body Size	X	D	5 BSC		
	Y	E	5 BSC		
Lead Pitch		e	0.5 BSC		
EP Size	X	J	3.05	3.15	3.25
	Y	K	3.05	3.15	3.25
Lead Length		L	0.35	0.4	0.45
		L1	0.3	0.4	0.35
Package Edge Tolerance		aaa	0.1		
Mold Flatness		bbb	0.1		
Coplanarity		ccc	0.08		
Lead Offset		ddd	0.1		
Exposed Pad Offset		eee	0.1		

Top Marking

Line 1: "SiT92110", SiTime part number
 Line 2: Blank
 Line 3: "LLLLL", Lot code from SiTime
 Line 4: Pin 1 dot and "SiTime" logo

Table 11. Revision History

Revisions	Release Date	Change Summary
0.5	9-Nov-2023	Initial Release
0.51	8-Jul-2024	Ordering Information update
0.52	28-Mar-2025	Ordering Code for Packaging updated with 4Ku/reel code "P" and 500u/reel code "N" Added Top Marking Section

SiTime Corporation, 5451 Patrick Henry Drive, Santa Clara, CA 95054, USA | **Phone:** +1-408-328-4400 | **Fax:** +1-408-328-4439

© SiTime Corporation 2023-2025. The information contained herein is subject to change at any time without notice. SiTime assumes no responsibility or liability for any loss, damage or defect of a Product which is caused in whole or in part by (i) use of any circuitry other than circuitry embodied in a SiTime product, (ii) misuse or abuse including static discharge, neglect or accident, (iii) unauthorized modification or repairs which have been soldered or altered during assembly and are not capable of being tested by SiTime under its normal test conditions, or (iv) improper installation, storage, handling, warehousing or transportation, or (v) being subjected to unusual physical, thermal, or electrical stress.

Disclaimer: SiTime makes no warranty of any kind, express or implied, with regard to this material, and specifically disclaims any and all express or implied warranties, either in fact or by operation of law, statutory or otherwise, including the implied warranties of merchantability and fitness for use or a particular purpose, and any implied warranty arising from course of dealing or usage of trade, as well as any common-law duties relating to accuracy or lack of negligence, with respect to this material, any SiTime product and any product documentation. Products sold by SiTime are not suitable or intended to be used in a life support application or component, to operate nuclear facilities, or in other mission critical applications where human life may be involved or at stake. All sales are made conditioned upon compliance with the critical uses policy set forth below.

CRITICAL USE EXCLUSION POLICY

BUYER AGREES NOT TO USE SITIME'S PRODUCTS FOR ANY APPLICATION OR IN ANY COMPONENTS USED IN LIFE SUPPORT DEVICES OR TO OPERATE NUCLEAR FACILITIES OR FOR USE IN OTHER MISSION-CRITICAL APPLICATIONS OR COMPONENTS WHERE HUMAN LIFE OR PROPERTY MAY BE AT STAKE.

SiTime owns all rights, title and interest to the intellectual property related to SiTime's products, including any software, firmware, copyright, patent, or trademark. The sale of SiTime products does not convey or imply any license under patent or other rights. SiTime retains the copyright and trademark rights in all documents, catalogs and plans supplied pursuant to or ancillary to the sale of products or services by SiTime. Unless otherwise agreed to in writing by SiTime, any reproduction, modification, translation, compilation, or representation of this material shall be strictly prohibited.