

Description

The Titan™ SiT11101 is an ultra-small 76.8 MHz resonator based on SiTime's advanced FujiMEMS™ process for applications where board space and power consumption are critical. The tiny 0505 footprint is available in a Chip-Scale (CSP) package for mounting on the PCB or as Known Good Die (KGD) for co-packaging with the SoC/MCU, facilitating the smallest product form factors. Enabling excellent phase noise, a wide operating temperature range of -40°C to 125°C, and unparalleled performance in high shock and vibration conditions, the SiT11101 is the ideal solution for IoT, medical, industrial, automotive and wearable applications.

Features

- Frequency: 76.8 MHz
- 0.46 mm x 0.46 mm, after singulation
- All-inclusive frequency stability as low as ±25 ppm
- Operating temperature range: up to -40°C to 125°C

Applications

- Bluetooth / BLE SoCs / Wi-Fi SoCs
- 802.15.4 (Matter, Zigbee, Thread) SoCs
- Proprietary wireless SoCs and Microcontrollers
- UWB SoCs
- Wearables, portable medical, various IoT end nodes


Electrical Characteristics

Table 1. Electrical Characteristics

These parameters are specified under the following conditions unless otherwise noted: $T_A = 25 \pm 1^\circ\text{C}$

Parameters	Symbol	Min.	Typ.	Max.	Unit	Condition
Nominal Frequency	F _{NOM}	–	76.8	–	MHz	At specified external load capacitance and nominal drive level
Frequency Tolerance at 25°C	F ₂₅	-10	–	+10	ppm	At specified external load capacitance and nominal drive level
Aging	F _{AGING}	–	±0.5	–	ppm	1-year Aging @ 25°C
		–	±1	–	ppm	5-years Aging @ maximum specified temperature
Automotive temperature range applications (-40°C to 125°C)						
Total Frequency Tolerance	F _{TOL}	-40	–	+40	ppm	Maximum specified all inclusive stability value which includes frequency tolerance at 25°C, frequency stability over temperature and 5 year aging @ 125°C
Frequency Stability Over Temperature	F _{TEMP}	–	±25	–	ppm	Within -40°C to 125°C range, with reference to 25°C. MEMS die temperature
Extended Industrial temperature range applications (-40°C to 105°C)						
Total Frequency Tolerance	F _{TOL}	-30	–	+30	ppm	Maximum specified all inclusive stability value which includes frequency tolerance at 25°C, frequency stability over temperature and 5 year aging @ 105°C
Frequency Stability Over Temperature	F _{TEMP}	–	±8	–	ppm	Within -40°C to 105°C range, with reference to 25°C. MEMS die temperature
Industrial temperature range applications (-40°C to 85°C)						
Total Frequency Tolerance	F _{TOL}	-25	–	+25	ppm	Maximum specified all inclusive stability value which includes frequency tolerance at 25°C, frequency stability over temperature and 5 year aging @ 85°C
Frequency Stability Over Temperature	F _{TEMP}	–	±8	–	ppm	Within -40°C to 85°C range, with reference to 25°C. MEMS die temperature
Extended Commercial temperature range applications (-30°C to 70°C)						
Total Frequency Tolerance	F _{TOL}	-25	–	+25	ppm	Maximum specified all inclusive stability value which includes frequency tolerance at 25°C, frequency stability over temperature and 5 year aging @ 70°C
Frequency Stability Over Temperature	F _{TEMP}	–	±8	–	ppm	Within -30°C to 70°C range, with reference to 25°C. MEMS die temperature
Operating Conditions						
Operating Temperature	T _{OPR}	-40	–	125	°C	MEMS die temperature. Value depends on part number
		-40	–	105		
		-40	–	85		
		-30	–	70		
Voltage Drive Level	V _{X1}	–	various	–	V _{pk-pk}	Corresponds to the voltage drive level of the target SoC/MCU. Value depends on part number
External Load Capacitance	C _{EXT}	1	–	8	pF	Value depends on part number

Dimensions and Patterns of CSP

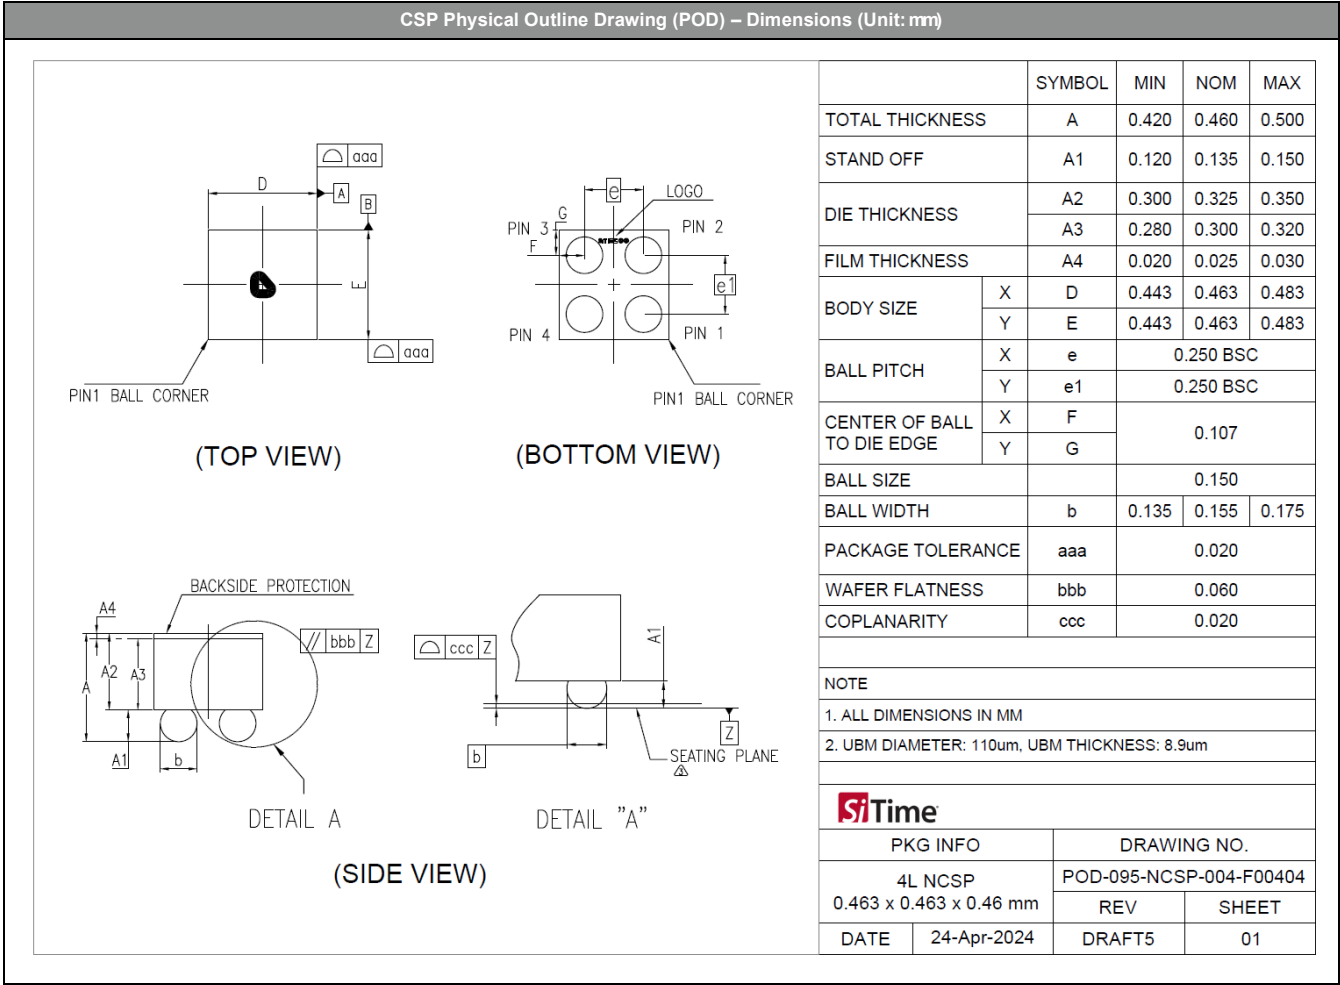

SiTime Corporation, 5451 Patrick Henry Drive, Santa Clara, CA 95054, USA | Phone: +1-408-328-4400 | Fax: +1-408-328-4439

© SiTime Corporation 2026. The information contained herein is subject to change at any time without notice. SiTime assumes no responsibility or liability for any loss, damage or defect of a Product which is caused in whole or in part by (i) use of any circuitry other than circuitry embodied in a SiTime product, (ii) misuse or abuse including static discharge, neglect or accident, (iii) unauthorized modification or repairs which have been soldered or altered during assembly and are not capable of being tested by SiTime under its normal test conditions, or (iv) improper installation, storage, handling, warehousing or transportation, or (v) being subjected to unusual physical, thermal, or electrical stress.

Disclaimer: SiTime makes no warranty of any kind, express or implied, with regard to this material, and specifically disclaims any and all express or implied warranties, either in fact or by operation of law, statutory or otherwise, including the implied warranties of merchantability and fitness for use or a particular purpose, and any implied warranty arising from course of dealing or usage of trade, as well as any common-law duties relating to accuracy or lack of negligence, with respect to this material, any SiTime product and any product documentation. Products sold by SiTime are not suitable or intended to be used in a life support application or component, to operate nuclear facilities, or in other mission critical applications where human life may be involved or at stake. All sales are made conditioned upon compliance with the critical uses policy set forth below.

CRITICAL USE EXCLUSION POLICY
BUYER AGREES NOT TO USE SITIME'S PRODUCTS FOR ANY APPLICATION OR IN ANY COMPONENTS USED IN LIFE SUPPORT DEVICES OR TO OPERATE NUCLEAR FACILITIES OR FOR USE IN OTHER MISSION-CRITICAL APPLICATIONS OR COMPONENTS WHERE HUMAN LIFE OR PROPERTY MAY BE AT STAKE.

SiTime owns all rights, title and interest to the intellectual property related to SiTime's products, including any software, firmware, copyright, patent, or trademark. The sale of SiTime products does not convey or imply any license under patent or other rights. SiTime retains the copyright and trademark rights in all documents, catalogs and plans supplied pursuant to or ancillary to the sale of products or services by SiTime. Unless otherwise agreed to in writing by SiTime, any reproduction, modification, translation, compilation, or representation of this material shall be strictly prohibited.